

# KM-61BAH

## SELF-CONTAINED CUBER WITH BUILT-IN STORAGE BIN

Item # \_\_\_\_\_

Project: \_\_\_\_\_

Qty: \_\_\_\_\_

\*AutoCad available on KCL

KM-61BAH

4/08

Item # 13216

### CUBER DIMENSIONS

W x D x H

**KM-61BAH**



17<sup>3/4</sup> x 24 x 39\*

\* with 6" legs



### KM-61BAH

Air-Cooled  
Shown

- Up to 71 lbs. of ice production per 24 hours
- Up to 38 lbs. of built-in storage capacity
- Individual crescent cube
- Durable stainless steel exterior
- CycleSaver® Design 
- EverCheck® alert system 
- Front in, front out airflow
- Stainless steel evaporator
- Slide in door
- Removable air filter
- Power switch accessible without panel removal
- Built-in installation possible
- R-134a Refrigerant



### Warranty

Valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact factory for warranty in other countries.

**Three Year** - Parts & Labor on entire machine.

**Five Year** - Parts on compressor and air-cooled condenser coil.

**Five Year** - Parts on evaporator.



# KM-61BAH

## SELF-CONTAINED CUBER WITH BUILT-IN STORAGE BIN

### DIMENSIONS

W x D x H

**KM-61BAH**  
17<sup>3/4</sup> x 24 x 39<sup>3/8</sup>  
\*with 6" legs

• Air-cooled

### AIR-COOLED

Water Temp ° F.	50°	70°	90°
Air Temp ° F. 70°	71	65	58
80°	66	56	51
90°	65	49	43



### UTILITY CONSUMPTION

Model Number	Ice Production Per Cycle		KWH per 100 LBS.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.
	Lbs.	Cubes			
KM-61BAH	1.7	80	10.5	20.3	N/A


### SPECIFICATIONS

Model Number	Condenser	Amperage	Min. Circuit Ampacity	Shipping Weight
KM-61BAH	Air-Cooled	3.4	15A	117 lbs.


### KM CUBE DIMENSIONS

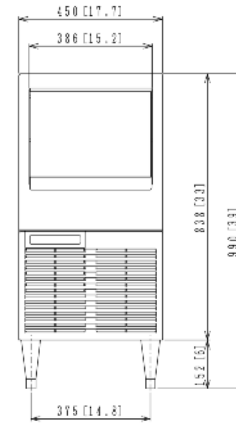

FRONT DIMENSIONS

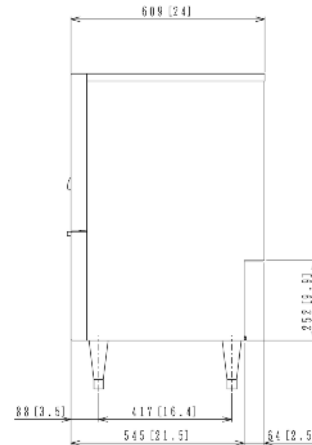

SIDE DIMENSIONS

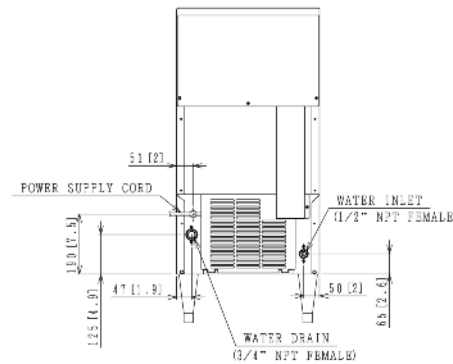

BACK DIMENSIONS

### ELECTRICAL & PLUMBING/KM-61BAH

- 115V/60/1
- 15 amp Max Fuse/HACR Breaker Size
- 3/8" OD copper or equivalent independent potable water supply
- 3/4" independent drain connection
- 1/2" FPT Water Inlet

### OPERATING LIMITS

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113psig
- Voltage Range 104 - 127V



© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

TEL 1-800-438-6087

FAX 1-800-345-1325

www.hoshizaki.com

Printed in U.S.A.



# KM-101BAH

## SELF-CONTAINED CUBER WITH BUILT-IN STORAGE BIN

Item # \_\_\_\_\_

Project: \_\_\_\_\_

Qty: \_\_\_\_\_

\*AutoCad available on KCL

KM-101BAH

4/08

Item # 13209



### CUBER DIMENSIONS W x D x H

**KM-101BAH**  
23<sup>3/4</sup> x 24 x 39\*  
\* with 6" legs



### KM-101BAH

Air-Cooled  
Shown

- Up to 115 lbs. of ice production per 24 hours
- Up to 53 lbs. of built-in storage capacity
- Individual crescent cube
- Durable stainless steel exterior
- CycleSaver® Design 
- EverCheck® alert system 
- Front in, front out airflow
- Stainless steel evaporator
- Slide in door
- Removable air filter
- Power switch accessible without panel removal
- Built-in installation possible
- Optional drain pump HS-0190 with HS-0215\*  
(\*HS-0215 included at no extra charge)
- Complies with California Energy Commission (CEC)
- R-134a Refrigerant

\* The KM-101BAH is ENERGY STAR certified.

### Warranty

Valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact factory for warranty in other countries.

**Three Year** - Parts & Labor on entire machine.

**Five Year** - Parts & Labor on: Evaporator.

**Five Year** - Parts on: Compressor, air-cooled condenser coil.



# SELF-CONTAINED CUBER WITH BUILT-IN STORAGE BIN

## DIMENSIONS

W x D x H

**KM-101BAH**  
23<sup>3/4</sup> x 24 x 39<sup>\*</sup>  
\*with 6" legs

• Air-cooled

## AIR-COOLED

Water Temp ° F.	50°	70°	90°
Air Temp ° F.			
70°	115	107	97
80°	109	97	87
90°	107	88	78



## UTILITY CONSUMPTION

Model Number	Ice Production Per Cycle		KWH per 100 LBS.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.
	Lbs.	Cubes			
KM-101BAH	2.31	110	9.4	23.0	N/A


## SPECIFICATIONS

Model Number	Condenser	Amperage	Min. Circuit Ampacity	Shipping Weight
KM-101BAH	Air-Cooled	5.2	15A	136 lbs.


## KM CUBE DIMENSIONS

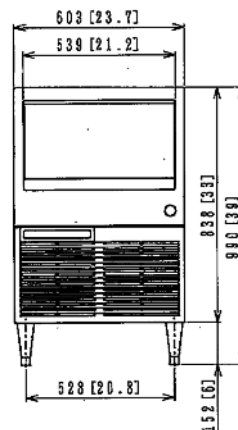

FRONT DIMENSIONS

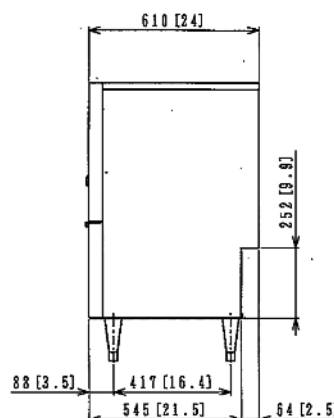

SIDE DIMENSIONS

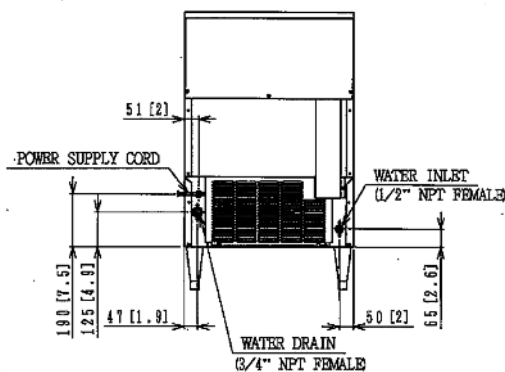

BACK DIMENSIONS

## ELECTRICAL & PLUMBING/KM-101BAH

- 115V/60/1
- 15 amp Max Fuse/HACR Breaker Size
- 3/8" OD copper or equivalent independent potable water supply
- 3/4" independent drain connection
- 1/2" FPT Water Inlet



© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

## OPERATING LIMITS

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113psig
- Voltage Range 104 - 127V

TEL 1-800-438-6087

FAX 1-800-345-1325

www.hoshizaki.com

Printed in U.S.A.



# KM-151B\_H

## SELF-CONTAINED CUBER WITH BUILT-IN STORAGE BIN

Item # \_\_\_\_\_

Project: \_\_\_\_\_

Qty: \_\_\_\_\_

\*AutoCad available on KCL

KM-151B\_H

8/09

Item # 13236

### CUBER DIMENSIONS

W x D x H

**KM-151B\_H**

23<sup>3/4</sup> x 28 x 39\*

\* with 6" legs





### KM-151BAH

Air-Cooled  
Shown

### KM-151BWH

Water-Cooled

- Up to 146 lbs. of ice production per 24 hours
- Up to 78 lbs. of built-in storage capacity
- Individual crescent cube
- Durable stainless steel exterior
- CycleSaver® Design 
- EverCheck® alert system 
- Front in, front out airflow (Air-cooled model only)
- Stainless steel evaporator
- Slide in door
- Removable air filter (Air-cooled model only)
- Power switch accessible without panel removal
- Built-in installation possible
- Complies with California Energy Commission (CEC)
- R-134a Refrigerant

\* The KM-151BAH is ENERGY STAR certified.

### Warranty

Valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact factory for warranty in other countries.

**Three Year** - Parts & Labor on entire machine.

**Five Year** - Parts & Labor on: Evaporator.

**Five Year** - Parts on: Compressor, air-cooled condenser coil.



# SELF-CONTAINED CUBER WITH BUILT-IN STORAGE BIN

## DIMENSIONS

W x D x H

**KM-151B\_H**  
23<sup>3/4</sup> x 28 x 39<sup>\*</sup>  
\*with 6" legs

- Air-cooled
- Water-cooled

### AIR-COOLED

Water Temp° F.	50°	70°	90°
Air Temp° F. 70°	146	139	129
Air Temp° F. 80°	140	129	119
Air Temp° F. 90°	139	<b>121</b>	111

### WATER-COOLED

Water Temp° F.	50°	70°	90°
Air Temp° F. 70°	146	141	136
Air Temp° F. 80°	142	135	131
Air Temp° F. 90°	141	<b>130</b>	125



### UTILITY CONSUMPTION

Model Number	Ice Production Per Cycle		KWH per 100 LBS.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.
	Lbs.	Cubes			
KM-151BAH	2.75	130	8.4	17.8	N/A
KM-151BWH	2.75	130	7.3	25.0	140


### SPECIFICATIONS

Model Number	Condenser	Amperage	Min. Circuit Ampacity	Shipping Weight
KM-151BAH	Air-Cooled	7.0	15A	150 lbs.
KM-151BWH	Air-Cooled	6.8	15A	154 lbs.


### KM CUBE DIMENSIONS

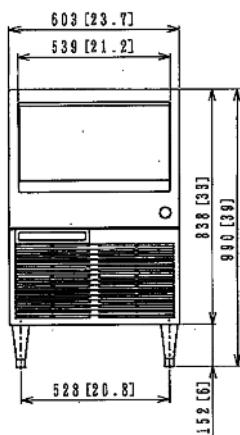


FRONT DIMENSIONS

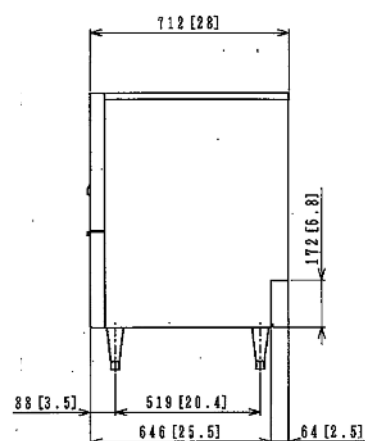

SIDE DIMENSIONS

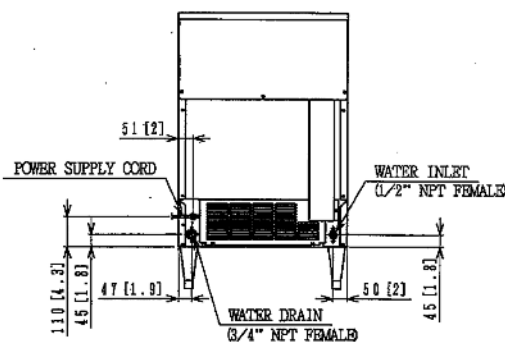

AIR-COOLED UNIT

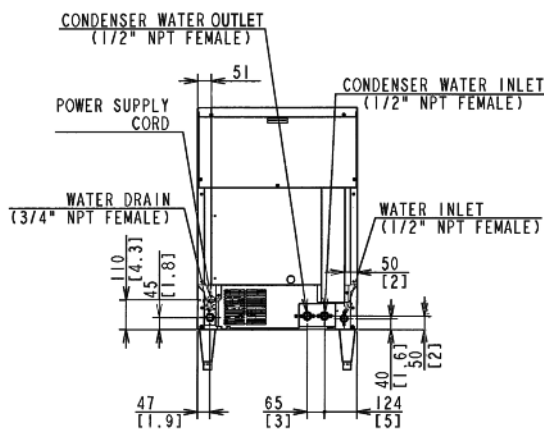

WATER-COOLED UNIT

### ELECTRICAL & PLUMBING/KM-151B\_H

- 115V/60/1
- 15 amp Max Fuse/HACR Breaker Size
- 3/8" OD copper or equivalent independent potable water supply
- 3/4" independent drain connection
- 1/2" FPT Water Inlet
- 1/2" FPT Condenser Water Outlet (Water-cooled model only)
- 1/2" FPT Condenser Water Inlet (Water-cooled model only)

### OPERATING LIMITS

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113psig
- Voltage Range 104 - 127V



© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

TEL 1-800-438-6087

FAX 1-800-345-1325

www.hoshizaki.com

Printed in U.S.A.



# KM-201B\_H

## SELF-CONTAINED CUBER WITH BUILT-IN STORAGE BIN

Item # \_\_\_\_\_

Project: \_\_\_\_\_

Qty: \_\_\_\_\_

\*AutoCad available on KCL

KM-201B\_H

9/09

Item # 13238

### CUBER DIMENSIONS

W x D x H

**KM-201B\_H**

24 x 28 x 39\*

\*with 6" legs





### KM-201BAH

Air-Cooled  
Shown

### KM-201BWH

Water-Cooled

- Up to 215 lbs. of ice production per 24 hours
- Built-in 80 lbs. ice storage
- Individual crescent cube
- Durable stainless steel exterior
- CycleSaver® Design 
- EverCheck® alert system 
- Stainless steel evaporator
- Removable air filter (Air-cooled model only)
- Complies with California Energy Commission guidelines (CEC)
- R-404A Refrigerant

\* The KM-201BAH is ENERGY STAR certified.



### Warranty

Valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact factory for warranty in other countries.

**Three Year** - Parts & Labor on entire machine.

**Five Year** - Parts & Labor on: Evaporator.

**Five Year** - Parts on: Compressor, air-cooled condenser coil.



# SELF-CONTAINED CUBER WITH BUILT-IN STORAGE BIN

**DIMENSIONS**  
W x D x H  
**KM-201B\_H**  
24 x 28 x 39"  
\*with 6" legs

- Air-cooled
- Water-cooled

## AIR-COOLED

Water Temp ° F.	50°	70°	90°
Air Temp ° F.			
70°	201	190	176
80°	193	177	162
90°	190	<b>165</b>	150

## WATER-COOLED


Water Temp ° F.	50°	70°	90°
Air Temp ° F.			
70°	215	207	192
80°	209	195	180
90°	207	<b>186</b>	171

## UTILITY CONSUMPTION

Model Number	Ice Production Per Cycle		KWH per 100 LBS. 90/70	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.
	Lbs.	Cubes			
KM-201BAH	4	182	7.5	22.0	N/A
KM-201BWH	4	182	5.9	24.0	141


## SPECIFICATIONS

Model Number	Condenser	Amperage	Shipping Weight
KM-201BAH	Air-Cooled	6.1	165 lbs.
KM-201BWH	Water-Cooled	5.5	165 lbs.

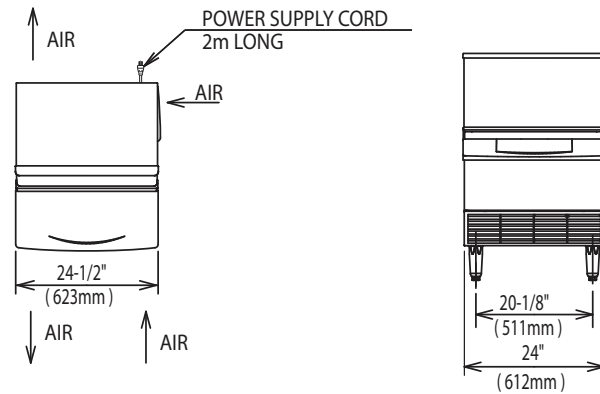


TOP VIEW - AIR-COOLED UNIT


FRONT VIEW

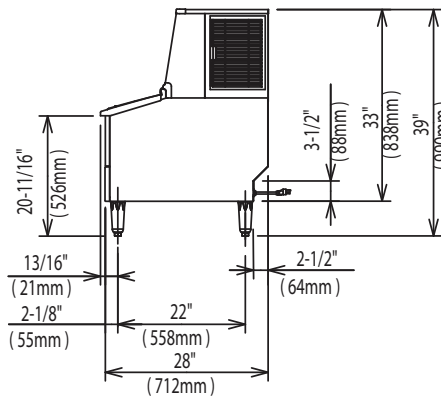

SIDE VIEW  
(LOUVERS ON AIR-COOLED UNIT ONLY)

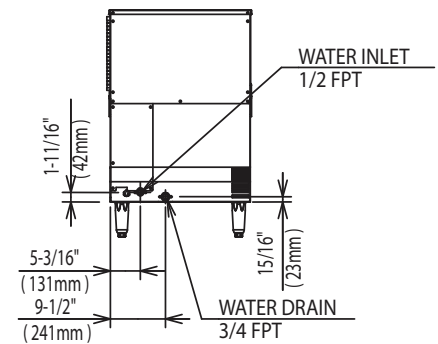

BACK VIEW - AIR-COOLED UNIT

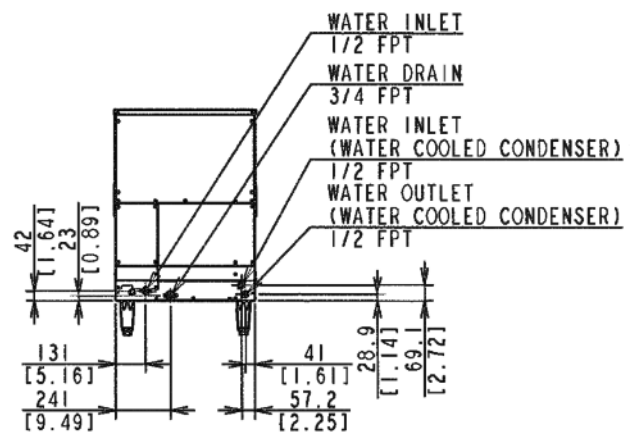

BACK VIEW / AIR-COOLED UNIT

## ELECTRICAL & PLUMBING/KM-201BWH

- 115V/60/1
- 15 amp Max Fuse/HACR Breaker Size
- 3/8" OD copper or equivalent independent potable water supply
- 3/4" FPT independent drain connection
- 1/2" FPT water inlet

## OPERATING LIMITS

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113psig
- Voltage Range 104 - 127V

## SERVICE

- Panels easily removed and all components accessible for service.
- Removable/cleanable air filters (Air-cooled model only)



© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

TEL 1-800-438-6087

FAX 1-800-345-1325

www.hoshizaki.com

Printed in U.S.A.



# KM-250BWF

## CRESCENT CUBER WITH BUILT-IN STORAGE BIN

Item # \_\_\_\_\_

Project: \_\_\_\_\_

Qty: \_\_\_\_\_

\*AutoCad available on KCL

KM-250BWF

4/08

Item # 13201

### CUBER DIMENSIONS W x D x H




**KM-250BWF**  
25 x 28 x 39



KM-250

### KM-250BWF Water-Cooled Shown



- Up to 233 lbs. of ice production per 24 hours
- Built-in 100 lbs. ice storage
- Individual crescent cube
- Protected by *HoshiGuard* Antimicrobial Agent 
- CycleSaver® Design 
- EverCheck® alert system 
- Stainless steel evaporator
- Corrosion-resistant stainless and PVC exterior surfaces provide longer life
- Stainless steel evaporator
- Removable air filter



### Warranty

Valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact factory for warranty in other countries.

**Three Year** - Parts & Labor on entire machine.

**Five Year** - Parts & Labor on: Evaporator.

**Five Year** - Parts on: Compressor, air-cooled condenser coil.



# KM-250BWF CRESCENT CUBER WITH BUILT-IN STORAGE BIN

## DIMENSIONS

**W x D x H**  
**KM-250BWF**  
25" x 28" x 39"  
\*with adj. 6" legs

• Water-cooled

## WATER-COOLED


Water Temp° F.	50°	70°	90°	
Air Temp° F.	70°	233	225	212
	80°	227	215	200
	90°	225	207	192

## UTILITY CONSUMPTION


Model Number	Ice Production Per Cycle		KWH per 100 LBS. 90/70	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.
	Lbs.	Cubes			
KM-250BWF	3.98	200	9.9	39.5	136

## SPECIFICATIONS


Model Number	Condenser	Amperage	Shipping Weight
KM-250BWF	Water-Cooled	7.5	190 lbs.

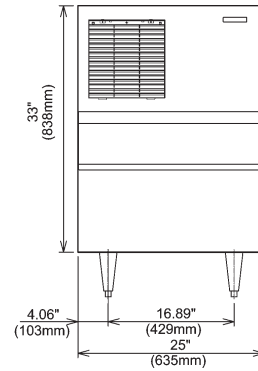

FRONT VIEW

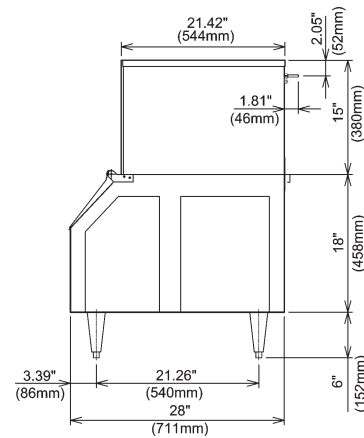

SIDE VIEW

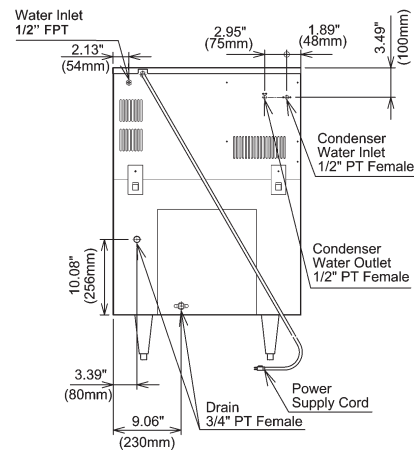

REAR VIEW

## ELECTRICAL & PLUMBING/KM-250BWF

- 115V/60/1
- 1/2" OD copper or equivalent independent potable water supply
- 3/4" FPT independent drain connection
- 1/2" FPT Water inlet

## OPERATING LIMITS

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113psig
- Voltage Range 104 - 127V

## SERVICE

- Panels easily removed and all components accessible for service.
- Removable/cleanable air filters



© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

TEL 1-800-438-6087

FAX 1-800-345-1325

www.hoshizaki.com

Printed in U.S.A.



# KM-260B\_H

## SELF-CONTAINED CUBER WITH BUILT-IN STORAGE BIN

Item # \_\_\_\_\_

Project: \_\_\_\_\_

Qty: \_\_\_\_\_

\*AutoCad available on KCL

KM-260B\_H

12/09

Item # 13239

### CUBER DIMENSIONS

W x D x H

**KM-260B\_H**

30 x 28 x 39\*

\*with 6" legs





### KM-260BAH

Air-Cooled  
Shown

### KM-260BWH

Water-Cooled

- Up to 268 lbs. of ice production per 24 hours
- Built-in 100 lbs. ice storage
- Individual crescent cube
- Durable stainless steel exterior
- CycleSaver® Design 
- EverCheck® alert system 
- Stainless steel evaporator
- Removable air filter (Air-cooled model only)
- Complies with California Energy Commission guidelines (CEC)
- R-404A Refrigerant

\* The KM-260BAH is ENERGY STAR certified.



### Warranty

Valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact factory for warranty in other countries.

**Three Year** - Parts & Labor on entire machine.

**Five Year** - Parts & Labor on: Evaporator.

**Five Year** - Parts on: Compressor, air-cooled condenser coil.



# SELF-CONTAINED CUBER WITH BUILT-IN STORAGE BIN

**DIMENSIONS**  
W x D x H  
**KM-260B\_H**  
30 x 28 x 39"  
\*with 6" legs

- Air-cooled
- Water-cooled

## AIR-COOLED

Water Temp ° F.	50°	70°	90°
Air Temp ° F.			
70°	263	245	227
80°	249	220	207
90°	245	200	185

## WATER-COOLED


Water Temp ° F.	50°	70°	90°
Air Temp ° F.			
70°	268	259	242
80°	261	247	228
90°	259	237	218

## UTILITY CONSUMPTION

Model Number	Ice Production Per Cycle		KWH per 100 LBS. 90/70	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.
	Lbs.	Cubes			
KM-260BAH	5	238	7.5	20.3	N/A
KM-260BWH	5	238	6.4	26.3	121


## SPECIFICATIONS

Model Number	Condenser	Amperage	Shipping Weight
KM-260BAH	Air-Cooled	7.6	187 lbs.
KM-260BWH	Water-Cooled	7.5	187 lbs.

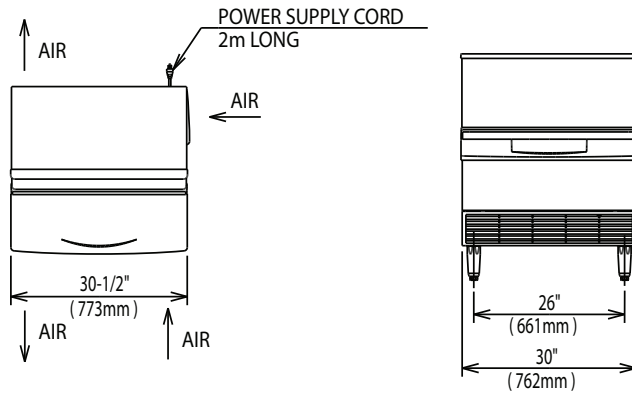


TOP VIEW


FRONT VIEW

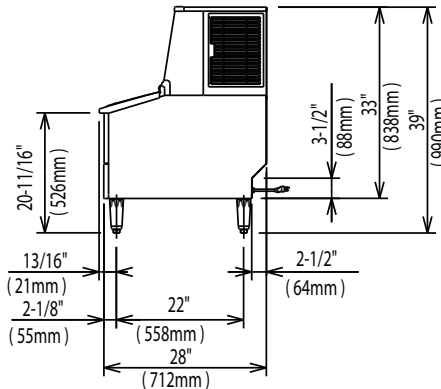

SIDE VIEW

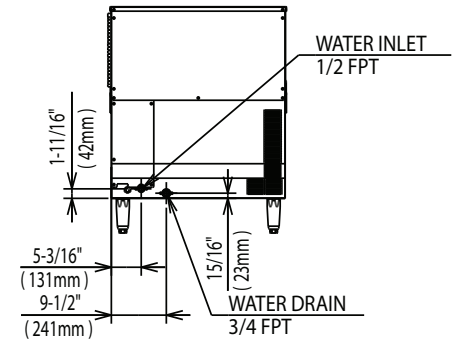

BACK VIEW / AIR-COOLED UNIT

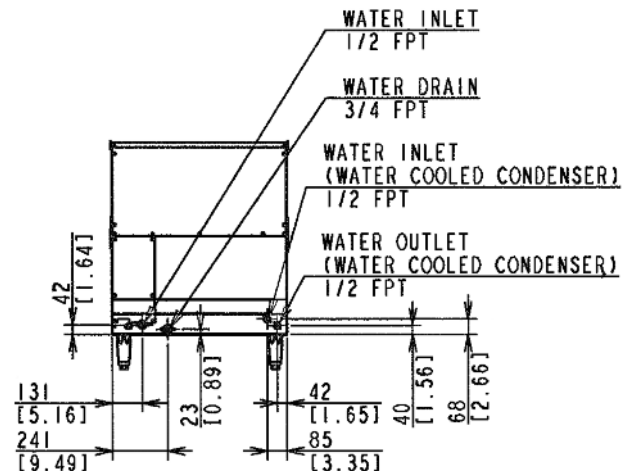

BACK VIEW / AIR-COOLED UNIT

## ELECTRICAL & PLUMBING/KM-260B\_H

- 115V/60/1
- 15 amp Max Fuse/HACR Breaker Size
- 3/8" OD copper or equivalent independent potable water supply
- 3/4" FPT independent drain connection
- 1/2" FPT water inlet

## OPERATING LIMITS

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113psig
- Voltage Range 104 - 127V

## SERVICE

- Panels easily removed and all components accessible for service.
- Removable/cleanable air filters (Air-cooled model only)



© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

TEL 1-800-438-6087

FAX 1-800-345-1325

www.hoshizaki.com

Printed in U.S.A.

