



POLYPROPYLENE PRODUCTS

### Setting the Standard in the Most Demanding Environments

NuAire offers a wide variety of polypropylene laboratory furniture and equipment products.

Products include the FumeGard vertical laminar airflow fume hoods, FumeGard conventional and by-pass fume hoods, FumeGard base cabinets, FumeGard

acid storage cabinets and a full line of polypropylene casework. All FumeGard hoods are available in nominal 4, 5, 6, and 8 foot lengths; and 24" or 30" work surface depths.

NuAire Polypropylene products are the ideal solution to meet your requirements. They have a proven performance record in a wide range of markets.

### Applications:

- Chemical Engineering
- Electrical Engineering
- Material Science
- Environmental Toxic Analysis
- Analytical Chemistry
- Metallurgy
- Water Treatment Facilities
- Toxicology
- Trace Metal Analysis
- Marine Science
- Waste Management
- Soil Science
- Semiconductor



## Table of Contents

FumeGard Series .....	4-9
NU-156 High Acid, Trace Metal Analysis Fume Hood .....	4-5
NU-162 Conventional Fume Hood .....	6-7
NU-164 By-Pass Fume Hood .....	8-9
Polypropylene Base Cabinets .....	10-11
Acid Storage Cabinets .....	12-13
Polypropylene Casework .....	14-24
Chemical Resistance Guide .....	25



A complete architectural specification CD is available upon request. 1.800.328.3352





## Durable Polypropylene Construction

NuAire Polypropylene products are constructed from primarily stress-relieved, fully seam-welded, and reinforced white polypropylene. The outer cabinet shell, inner workspace walls, spill trough plenum under workspace, and shelves are constructed from ½ inch [12 mm] polypropylene. The exhaust duct, access panels, and work surface are constructed from ¼ inch [6 mm] polypropylene.

Our product's basic construction is polypropylene. However, depending upon customer requirements, other thermoplastics may be used. Polyvinyl Chloride [PVC], Chlorinated Polyvinyl

Chloride [CPVC], Flame Retardant Polypropylene, Polyvinylidene Fluoride [PVDF], High Density Polyethylene [HDPE], and TFE-Tetrafluoroethylene [Teflon®] are available.

## Virtually Metal Free

All FumeGard cabinets are virtually metal free and do not use nylon components. "Double wall" construction forms the plumbing chase for the routing and connection of all services required, including the electrical outlets. This compartment is constantly under negative pressure, to minimize any fume build-up that may occur. Access panels are provided for front maintenance of HEPA filters, services, electronic systems, and counterweight

balance system. Hinges, screws, bolts, sinks, and miscellaneous items are also constructed of polypropylene

Polypropylene is a highly corrosion-resistant material that has high temperature and tensile strength. It possesses excellent chemical resistance to organic solvents and degreasing agents as well as electrolytic attack. The properties of polypropylene are enhanced with anti-oxidizing agents and UV stabilizers to increase strength and improve thermal characteristics. Polypropylene is lightweight, stain resistant, and has a low moisture absorption rate. All this makes NuAire polypropylene products an excellent choice for long-lasting, highly corrosive-resistant, metal-free applications.





## Standard Features

HEPEX™ Zero Leak Airflow System

Separator-less HEPA Filter—  
99.99% Efficient

PVC Diffuser

PVC View Screen Wiper

Front Filter Removal

Sliding Lexan™ View Screen:  
Fully Closed to 20" Open

Removable Solid Work Surface with  
Front and Rear Perforated Grills

¼ inch Stress-relieved, Seam-welded,  
Polypropylene Super Structure

Spill Trough Plenum under  
Work Surface

Modular Electrical Component  
Construction

Flush Mounted Interior Plumbing  
Access Panels

Non-metallic Interior for Trace  
Metal / Element Analysis

HEPA Filter/Blower Module  
Construction in Polypropylene

PVC Encased Window  
Counterbalance

Teflon® Coated Motorized Impeller

PVC Covered Electrical Outlets

Polypropylene Control Center Plate

Totally Enclosed Fluorescent  
Lighting, 100 ft. candles on  
Work Surface

All metallic components of the NU-156 are encased in Teflon®, epoxy, or PVC to maintain a metal-free work environment. For instance, the window counter-balance contains metallic weights, but is encased in PVC. [A] Optional interior components are also totally metal-free. The 12" x 12" x 5" sloped bottom polypropylene sink [B] basin and strainer are fabricated from ¼ inch polypropylene.



## OPTIONAL FEATURES

- Mini-helic Gauge: 0-2 Inches w.g. for Supply Pressure
- Remote Controlled Service Fixtures (Epoxy Coated Brass, PVC, PVDF)
- Gooseneck Faucets Either Remote or Internally Controlled Available in: brass, Tin-lined Brass, PVC, PVDF, or Polypropylene
- 12" x 12" x 5" Sloped Bottom Polypropylene Sink with Strainer
- Chemically Resistant "P" Trap Available in PVC, ABS or Polypropylene
- External Duplex Electrical Outlets
- Ground Fault Circuit Interrupter (GFI)
- D.I., N2 Teflon® Spray Guns
- 335 Alnor® Airflow Monitor
- Exhaust Blower Interlock with Exhaust Monitor Alarm
- Polypropylene Exhaust Transition, Rectangular to Round
- 99.999% Efficient HEPA Filter (ULPA) on 0.12 Microns
- Fully Perforated Work Surface (10% open)

## Polypropylene and/or Thermoplastic Construction

The NU-156 is constructed almost entirely of polypropylene or other thermoplastics. Metal usage is kept to an absolute minimum. Any necessary metal parts are coated with either epoxy or Teflon®. For example, the motor/blower unit is coated with Teflon®. In addition, the electrical outlets use PVC covers, the control center uses a polypropylene face plate, and the fluorescent lights are totally enclosed in a polypropylene fixture. The cabinet shell, inner workspace, base plenum, shelves, and top HEPA filter/ blower module are manufactured using ½ inch polypropylene. The supply HEPA filter is metal-free and separator-less, and has

an efficiency rating of 99.99% for removal of particulate matter of 0.3 microns. The clear view screen is made of non-glare Lexan™, and the window counter-balance mechanism is encased in PVC. The supply air diffuser and view screen wiper are made from a PVC thermoplastic which makes the entire workspace interior metal-free.

## HEPEX™ Zero Leak Airflow System

The HEPEX™ system, which is available only from NuAire, results in quiet, uniform, and sterile down flow over the work zone. The HEPEX™ system also prevents uneven particulate loading by eliminating direct blower blasts to the HEPA filter, and dispensing air over 100% of the HEPA filter surface.

The system surrounds all positive pressure airflow chambers and ducts with vacuum or negative air pressure relative to the laboratory. This limits the possibility of cabinet or gasket leaks and guards against HEPA filter failure.

The FumeGard NU-156 has been designed and tested by NuAire to meet product and personnel containment performance as established by National Sanitation Foundation Standard No. 49 for Biological Safety Cabinets. These cabinets meet or exceed Federal Standard 209e, Class 10 air quality conditions, and have been independently tested for containment properties in accordance to ASHRAE Standard 110-1995 for Fume Hoods.

## FUMEGARD NU-156 SPECIFICATIONS

Overall Dimensions	4 Foot Models	5 Foot Models	6 Foot Models	8 Foot Models
Width	48½" (1232 mm)	60½" (1537mm)	72½" (1842 mm)	96½" (2451 mm)
Depth: 24" surface	34" (864 mm)	34" (864 mm)	34" (864 mm)	34" (864 mm)
Depth: 30" surface (includes light and duct)	40" (1016 mm)	40" (1016 mm)	40" (1016 mm)	40" (1016 mm)
Height (includes pre-filter grill)	69 <sup>5</sup> / <sub>8</sub> " (1768 mm)	69 <sup>5</sup> / <sub>8</sub> " (1768 mm)	69 <sup>5</sup> / <sub>8</sub> " (1768 mm)	72 <sup>5</sup> / <sub>8</sub> " (1845 mm)
Work Area Dimensions				
Width	38½" (978 mm)	50½" (1283 mm)	62½" (1588 mm)	86½" (2197 mm)
Depth: 24" Work Surface	25½" (648 mm)	25½" (648 mm)	25½" (648 mm)	25½" (648 mm)
30" Work Surface	31½" (800 mm)	31½" (800 mm)	31½" (800 mm)	31½" (800 mm)
Height	29" (737 mm)	29" (737 mm)	29" (737 mm)	29" (737 mm)
Shipping Weight***				
24" Work Surface	705 lbs. (320 kg)	730 lbs. (332 kg)	825 lbs. (375 kg)	1265 lbs. (575 kg)
30" Work Surface	756 lbs. (344 kg)	839 lbs. (381 kg)	900 lbs. (409 kg)	1325 lbs. (602 kg)
Exhaust Static	0.8" (20 mm) w.g.	1.0" (25 mm) w.g.	1.2" (30 mm) w.g.	1.5" (38 mm) w.g.
Exhaust Volume **				
24" Work Surface	690 CFM (1171 M/Hr)	905 CFM (1538 M/Hr)	1120 CFM (1903 M/Hr)	1550 CFM (2633 M/Hr)
30" Work Surface	785 CFM (1334 M/Hr)	1030 CFM (1753 M/Hr)	1275 CFM (2168 M/Hr)	1765 CFM (3000 M/Hr)
Exhaust Duct Opening	4" x 24" (102 x 610 mm)	4" x 30" (102 x 762 mm)	4" x 30" (102 x 762 mm)	4" x 36" (102 x 914 mm)
Airflow Characteristics	Down Flow Velocity: 60 LFPM (0.30 m/s) Inflow Velocity: 105 LFPM (0.53 m/s)			
Electrical Requirements	115 Volts AC, 60 Hz -or- 230 50 Hz			
	Blower/Lights (Amps): 6 (8 for 8ft. Model) -or- (3 @ 230 VAC)			
	Outlet 115 V (Amps): 15* -or- (10 @ 230 VAC)			

\*If more amperage is required, separate circuits can be provided at additional cost. \*\*Metal or PVC junction box is provided for electrical connections. \*\*\*Includes fume hood base cabinet. The leg levelers, easy-to-clean handles, hinges and screws are all made of polypropylene. Each solid polypropylene door has adjustable ventilation air vents and is secured with an easy-to-open concealed magnetic latch.



## Polypropylene Construction

The FumeGard NU-162 is built primarily of stress-relieved polypropylene to which NuAire has added anti-oxidizing agents and UV stabilizers. This increases tensile strength and improves thermal characteristics. No nylon components are used. The outer cabinet shell, inner workspace, optional base, and exhaust plenums are constructed from ½ inch polypropylene. The exhaust duct and access panels use ¼ inch polypropylene. Polypropylene is highly corrosion-resistant and able to withstand organic solvents, degreasing agents, and electrolytic attack.

NuAire polypropylene products are a long-lasting choice for applications that require highly corrosive materials or a metal-free work environment.

### STANDARD FEATURES

- Superstructure Constructed from ½ inch Stress-relieved, all Seam-welded, White Polypropylene
- No Nylon Components
- All Negative Pressure Interior
- Removable Rear Baffle
- ½ inch Thick Polypropylene Work Surface
- Lower Work Access Air Foil
- Counterbalanced Sliding Lexan™ View Screen: fully closing to 18" open
- Sealed Interior Fluorescent Lighting: 120 ft. candles on work surface
- Electronic Fluorescent Light Ballast
- Flush Mounted Exterior/interior Plumbing Access Panels
- Adjustment for Light/Heavy Glass
- Polypropylene Hardware: Hinges, Screws, Handles

### OPTIONAL FEATURES

- Mini-helic Gauge
- Remote Controlled Service Fixtures
- Remote Controlled Goosenecks
- Internally Ball Valve Controlled Gooseneck
- Interior Service Fixtures
- Hot/cold Water Mixing Gooseneck Faucet
- Vacuum Breaker for Gooseneck
- Duplex Electrical Outlet (external only)
- Polypropylene Sink with Strainer
- Cupsink Polypropylene
- Cascade Rinse Tanks
- D.I. Teflon® Spray Guns
- 335 Alnor® Airflow Monitor
- Flame Retardant Polypropylene
- Front Slanted Control Panel
- Adjustable Interior Base Cabinet Shelves
- Exhaust Duct Washdowns
- 28" Work Access Window Opening
- Exhaust Damper with Quadrant Lock
- PVDF Lined Interior
- Modified Epoxy Resin Work Surface

## Alternate Thermoplastic Construction Available

In addition to polypropylene, Polyvinyl Chloride [PVC], Chlorinated Polyvinyl Chloride [CPVC], Flame Retardant Polypropylene, Polyvinylidene Fluoride [PVDF], High Density Polyethylene [HDPE], and TFE-Tetrafluoroethylene [Teflon®] are available.

## Designed To Capture, Contain and Exhaust

The FumeGard NU-162 has a single piece airfoil across the bottom of the work access opening. With the view screen

sash fully opened the work access opening height is 18" at an average air inflow velocity of 100 LFPM. As the sash is lowered, the face velocity increases rapidly. Fumes, gases, vapors, aerosols, and most particulate matter is drawn through vents in the rear wall of the cabinet by an exterior exhaust system. "Double wall" construction forms the plumbing chase for routing and connection of all services required, including electrical outlets. This compartment is under negative pressure, to minimize fume build-up. Access panels are provided for internal maintenance.

## Durable and Flexible Design

The FumeGard NU-162 Conventional Fume Hood is manufactured in four standard widths [nominal]: 4, 5, 6, and 8 feet with two standard work surface depths of 24" or 30". Each cabinet is thoroughly inspected before shipment. The final inspection certifies the fume hood's performance to SEFA 1-1992 and a copy of this test report is shipped with each cabinet. The NU-162 FumeGard has been independently tested to meet and exceed the requirements of ASHRAE Standard 110-1995.

## FUME GARD NU-160 SERIES SPECIFICATIONS

Overall Dimensions	4 Foot Models	5 Foot Models	6 Foot Models	8 Foot Models
Width	48½" (1232 mm)	60½" (1537 mm)	72½" (1842 mm)	96½" (2451 mm)
Depth (excludes removable canopy)	31½"–37½" (800-952 mm)	31½"–37½" (800-952 mm)	31½"–37½" (800-952 mm)	31½"–37½" (800-952 mm)
Height (includes exhaust collar)	60½" (1537 mm)	60½" (1537 mm)	60½" (1537 mm)	60½" (1537 mm)
Height (with base)	88¾" (2254 mm)	88¾" (2254 mm)	88¾" (2254 mm)	88¾" (2254 mm)

Work Area Dimensions				
Width	38½" (978 mm)	50½" (1283 mm)	62½" (1588 mm)	86½" (2197 mm)
Depth 24" work surface	25½" (648 mm)	25½" (648 mm)	25½" (648 mm)	25½" (648 mm)
30" work surface	31½" (800 mm)	31½" (800 mm)	31½" (800 mm)	31½" (800 mm)
height	29" (737 mm)	29" (737 mm)	29" (737 mm)	29" (737 mm)

Shipping Weight***				
24" Work Surface	705 lbs. (320 kg)	730 lbs. (332 kg)	825 lbs. (375 kg)	1265 lbs. (575 kg)
30" Work Surface	756 lbs. (344 kg)	839 lbs. (381 kg)	900 lbs. (409 kg)	1325 lbs. (602 kg)

Airflow Characteristics				
Inflow Velocity	105 LFPM (0.53 m/s)	105 LFPM (0.53 m/s)	105 LFPM (0.53 m/s)	105 LFPM (0.53 m/s)
Exhaust Volume (window full open)	505 CFM (858 CMH)	662 CFM (1125 CMH)	820 CFM (1393 CMH)	1135 CFM (1929 CMH)
Exhaust Static	0.3" (8 mm) w.g.	0.4" (10 mm) w.g.	0.5" (13 mm) w.g.	0.8" (20 mm) w.g.
Exhaust Duct Opening	12" diameter (305 mm)	12" diameter (305 mm)	12" diameter (305 mm)	12" diameter (305 mm)

Electrical Requirements **				
Volts AC, 60 Hz	115	115	115	115
Optional 230 VAC	230 50 Hz	230 50 Hz	230 50 Hz	230 50 Hz
Lights (Amps):	1	1	1	1
Amps @ Optional 230 VAC	½	½	½	½
Outlet (Amps):	15	15	15	15
Amps @ Optional 230 VAC	10	10	10	10

\* If more amperage is required, separate circuits can be provided at additional cost. \*\* For electrical connections PVC junction box is provided. \*\*\* Includes fume hood base cabinet. The leg levelers, easy-to-clean handles, hinges and screws are all made of polypropylene. Each solid polypropylene door has adjustable ventilation air vents and is secured with an easy-to-open concealed magnetic latch.



STANDARD FEATURES

- Superstructure Constructed from ½ inch Stress-relieved, all Seam-welded, White Polypropylene
- No Nylon Components
- All Negative Pressure Interior
- By-pass Feature Evens Airflow as Window is Lowered or Raised
- ½ inch Thick Polypropylene Work Surface
- Removable Rear Baffle
- Flush Mounted Exterior/interior Plumbing Access Panels
- Sealed Interior Fluorescent Lighting: 120 ft. candles on work surface
- Electronic Fluorescent Light Ballast
- Counterbalanced Sliding Lexan™ View Screen: fully closing to 18" open
- Lower Work Access Air Foil

## 100% Polypropylene Construction

The FumeGard NU-164 is constructed of stress-relieved, white polypropylene. The outer cabinet shell, inner workspace, base and exhaust plenums are constructed from ½ inch polypropylene. The exhaust duct, baffle and access panels use ¼ inch polypropylene. Polypropylene's excellent overall solvent/acid resistance makes this fume hood an excellent choice for long-lasting, highly corrosive-resistant, metal-free applications.

## Designed To Capture, Contain and Exhaust

The FumeGard NU-164 Fume Hood has a by-pass, protected by a grill, which maintains a relatively constant volume of

airflow through the hood. As the sash is closed, air is bypassed at the top of the hood, causing the hood face velocity to increase at a much less rapid rate than a conventional fume hood.

A deflector vane or airfoil across the bottom of the hood access opening directs airflow across the work surface. The deflector vane provides a permanent opening even when the sash is closed even though the majority of the air that is exhausted enters the fume hood through the by-pass.

## Control Center

The eye-level Control Center has on/off switches for the exterior mounted fluorescent light or optional electrical devices such as outlets, window alarms,

night setback controls, or exhaust blower interlock systems.

## Durable Construction, Flexible Design

The FumeGard NU-164 By-Pass Fume Hood is manufactured in four standard widths [nominal]: 4, 5, 6, and 8 feet with two standard work surface depths of 24" or 30". The cabinet is designed to set either on existing casework or a polypropylene base supplied by NuAire. The NU-164 can be designed to meet your specific laboratory requirements using different types and sizes of sinks, faucets, work surfaces, remote controlled service valves, or other customer requested design specifications.

Metallic components, such as the fluorescent lighting, are fully encased in non-metallic materials.



## OPTIONAL FEATURES


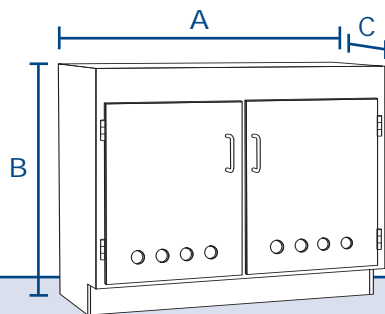
- Mini-helic Gauge
- Remote Controlled Service Fixtures
- Remote Controlled Goosenecks
- Internally Ball Valve Controlled Gooseneck
- Interior Service Fixtures
- Hot/cold Water Mixing Gooseneck Faucet
- Vacuum Breaker for Gooseneck
- Duplex Electrical Outlet (external only)
- Polypropylene Sink With Strainer
- Cupsink Polypropylene
- Cascade Rinse Tanks
- D.I. Teflon® Spray Guns
- 335 Alnor® Airflow Monitor
- Flame Retardant Polypropylene
- Front Slanted Control Panel
- Adjustable Interior Base Cabinet Shelves
- Exhaust Duct Washdowns
- 28" Work Access Window Opening
- Exhaust Damper with Quadrant Lock
- PVDF Lined Interior
- Modified Epoxy Resin Work Surface

NU-55 Fume Hood Base


The NU-55 Fume Hood Base is available as an option for NuAire polypropylene fume hoods. The NU-55 is constructed from long-lasting, corrosion-resistant, white polypropylene. The outer cabinet shell, kick panel, and shelves are constructed using 1/2 inch polypropylene. The rear access panels use 1/4 inch polypropylene. The entire cabinet is totally seam welded and reinforced with polypropylene supports to ensure the cabinets' ability to withstand the weight of the FumeGard Fume Hood. All bases come with adjustable leg levelers with 1 1/4" maximum adjustment.




NU-55-624 Fume Hood Base

NU-55 FUME HOOD BASE		A	B	C	
		NU-55-424	48 1/2"	28 3/4"	26"
		NU-55-430	48 1/2"	28 1/4"	32"
		NU-55-524	60 1/2"	28 3/4"	26"
		NU-55-530	60 1/2"	28 3/4"	32"
		NU-55-624	72 1/2"	28 3/4"	26"
		NU-55-630	72 1/2"	28 3/4"	32"
		NU-55-824	96 1/2"	28 3/4"	26"
		NU-55-830	96 1/2"	28 3/4"	32"


4 FOOT FUME HOOD BASE

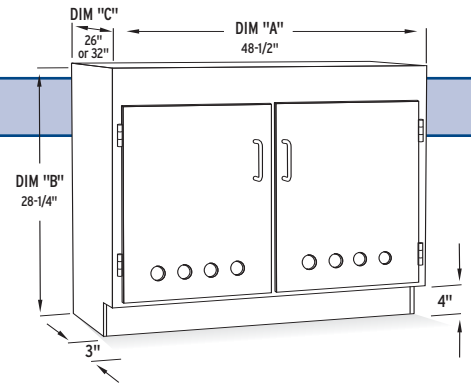


5 FOOT FUME HOOD BASE

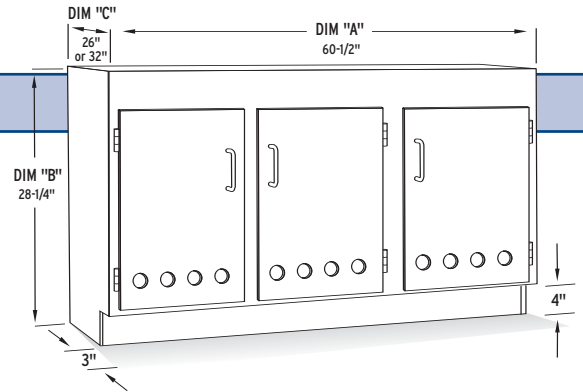

6 FOOT FUME HOOD BASE

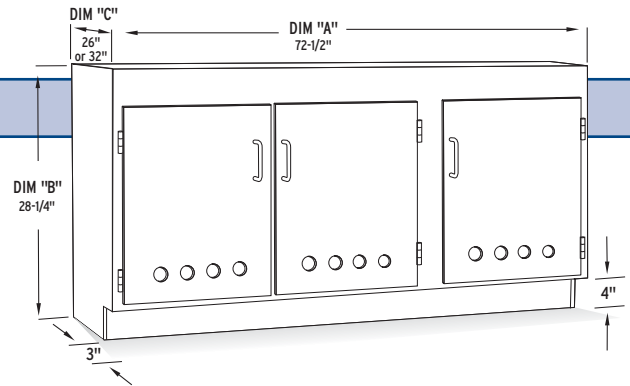

8 FOOT FUME HOOD BASE

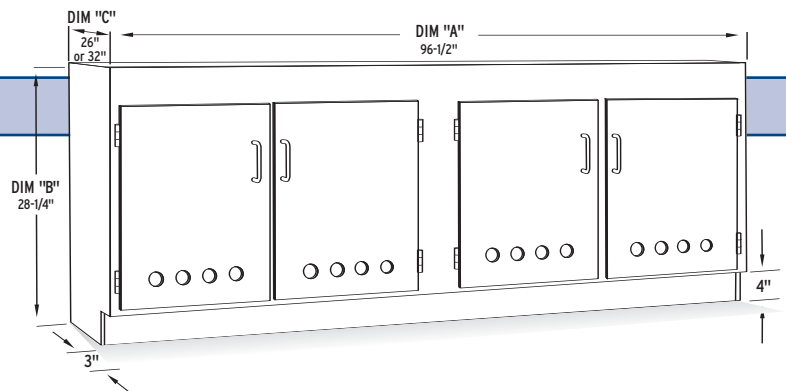


## NU-53 ACID STORAGE CABINETS


NU-53 Acid Storage Cabinets are constructed from stress-relieved, fully seam-welded, white polypropylene. The outer cabinet shell, kick plate, and shelves are constructed from ½ inch polypropylene. The NU-53 Tall Double Door cabinet has one fixed and two adjustable shelves with drip-proof lips.

The NU-53 cabinet comes with a capped vent placed at the customer's specified location.


Each solid ½ inch polypropylene door features easy-to-clean handles, as well as hinges, and screws made of polypropylene. Each door is secured with a Teflon® coated magnetic catch.

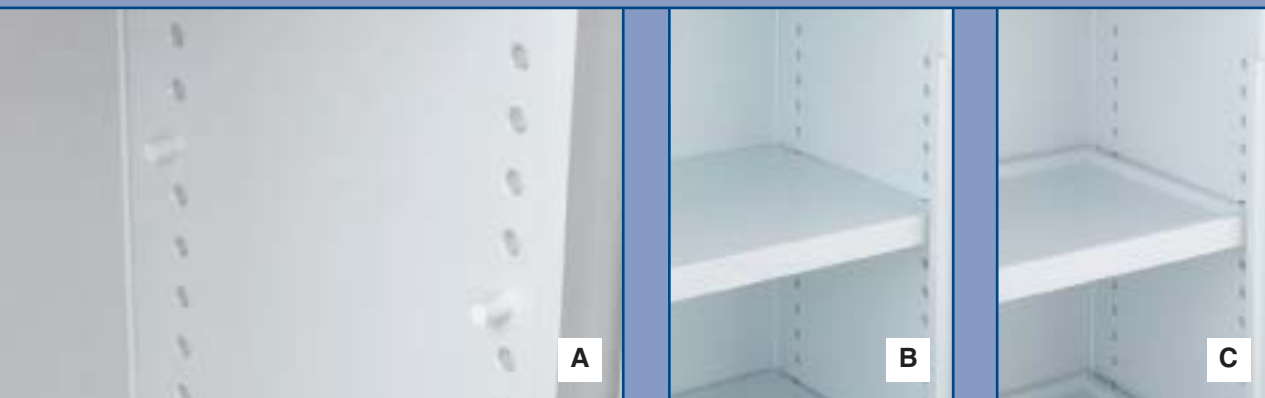

The NU-53 features top and bottom shelves that are removable and adjustable in 2" increments using the provided pegs. [A] The shelves are also reversible, flat on one side [B] and with a ½" lip on the reverse side to contain spilled liquids. [C]

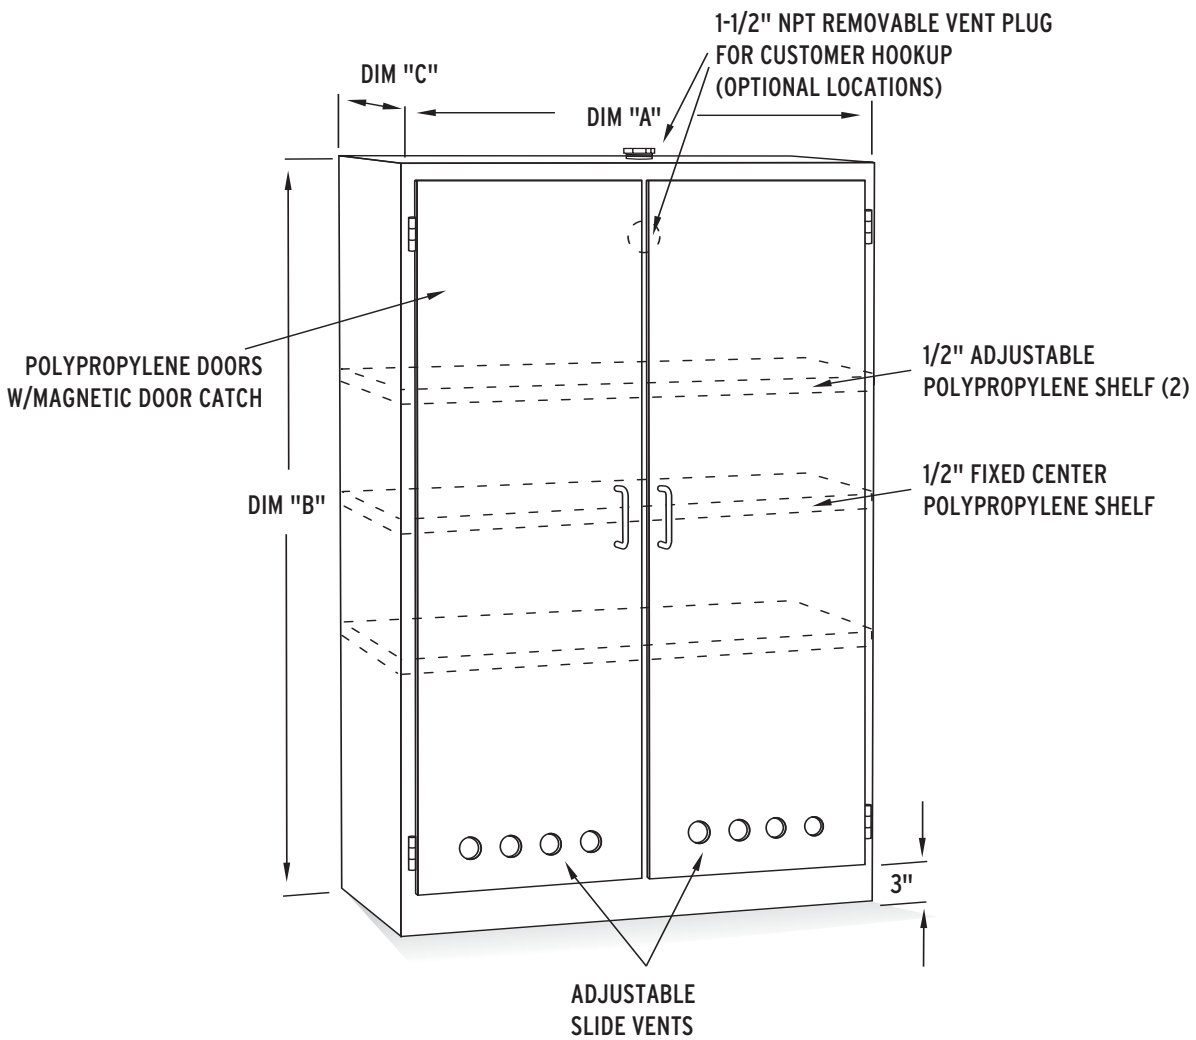

NU-53	A	B	C	TALL VENTED ACID STORAGE CABINET
NU-53-3660	36"	60"	18"	
NU-53-4260	42"	60"	18"	
NU-53-4860	48"	60"	18"	
NU-53-3684	36"	84"	22"	
NU-53-4284	42"	84"	22"	
NU-53-4884	48"	84"	22"	

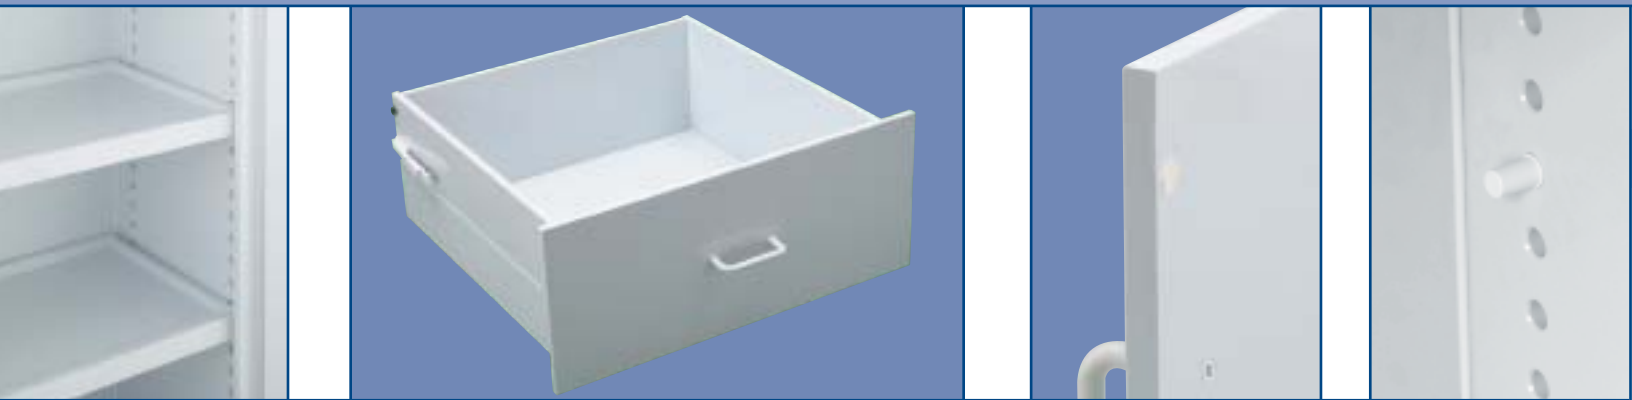

All polypropylene casework is manufactured using stress-relieved, fully seam-welded, white polypropylene. The outer cabinet shell, kick plate, and shelves are constructed from 1/2 inch polypropylene. All polypropylene walls/floors are reinforced where required to maintain structural integrity. All base cabinets with doors will have 1/4 inch flush mounted access panels.

Cabinets are manufactured in various sizes and types using one piece solid construction. Drawers, drawer guides, sliding window components, drawer pulls, handles, hinges, and screws are all manufactured using polypropylene. Solid polypropylene doors are readily removable and hinges easily replaceable. Sliding wall case doors may use glass, Lexan™ or solid polypropylene. Wall


case and base cabinet shelves are adjustable and come with a drip-proof 1/2 inch lip.

NuAire polypropylene casework is designed to conform to a wide variety of unique customer requirements. Modifications, additions, optional accessories or customer-designed products can be fabricated to meet the specific needs of your laboratory application.

**NU-16 COMBINATION EIGHT DRAWER UNIT**



**NU-13 BASIC FIVE DRAWER UNIT**

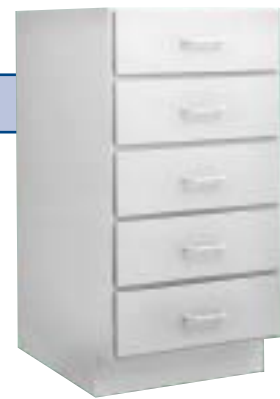

**NU-43 DOUBLE HINGED FRAMED GLASS DOOR WALL CASE**



**NU-30 DOUBLE DRAWER/DOOR COMBINATION UNIT**




# POLYPROPYLENE CASEWORK




## NU-10 Basic Four Drawer Unit

	A	B	C
NU-10-1830	18"	29"	22"
NU-10-2430	24"	29"	22"
NU-10-3030	30"	29"	22"
NU-10-3630	36"	29"	22"
NU-10-1836	18"	35"	22"
NU-10-2436	24"	35"	22"
NU-10-3036	30"	35"	22"
NU-10-3636	36"	35"	22"

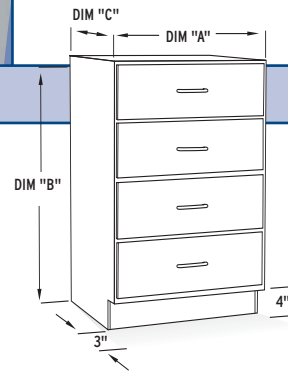


## NU-11 Basic Three Drawer Unit

	A	B	C
NU-11-1830	18"	29"	22"
NU-11-2430	24"	29"	22"
NU-11-3030	30"	29"	22"
NU-11-3630	36"	29"	22"
NU-11-1836	18"	35"	22"
NU-11-2436	24"	35"	22"
NU-11-3036	30"	35"	22"
NU-11-3636	36"	35"	22"

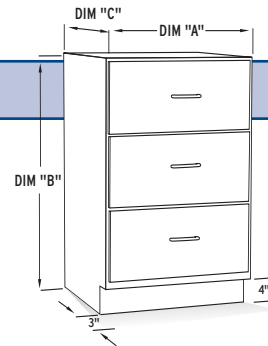


## NU-13 Basic Five Drawer Unit

	A	B	C
NU-13-1836	18"	35"	22"
NU-13-2436	24"	35"	22"
NU-13-3036	30"	35"	22"
NU-13-3636	36"	35"	22"

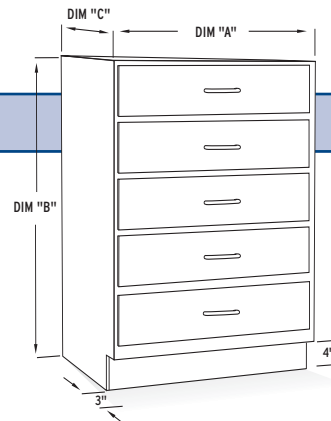


**NU-15**    **A**    **B**    **C**    **Combination Six Drawer Unit**

NU-15-3630	36"	29"	22"
NU-15-4230	42"	29"	22"
NU-15-4830	48"	29"	22"
NU-15-3636	36"	35"	22"
NU-15-4236	42"	35"	22"
NU-15-4836	48"	35"	22"

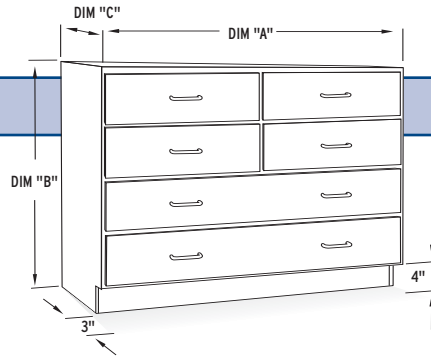


**NU-16**    **A**    **B**    **C**    **Combination Eight Drawer Unit**

NU-16-3636	36"	35"	22"
NU-16-4236	42"	35"	22"
NU-16-4836	48"	35"	22"

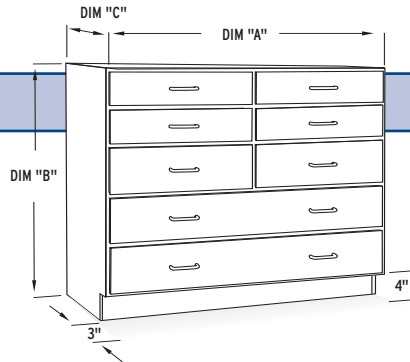


**NU-17**    **A**    **B**    **C**    **Combination Seven Drawer Unit**

NU-17-3630	36"	29"	22"
NU-17-4230	42"	29"	22"
NU-17-4830	48"	29"	22"
NU-17-3636	36"	35"	22"
NU-17-4236	42"	35"	22"
NU-17-4836	48"	35"	22"

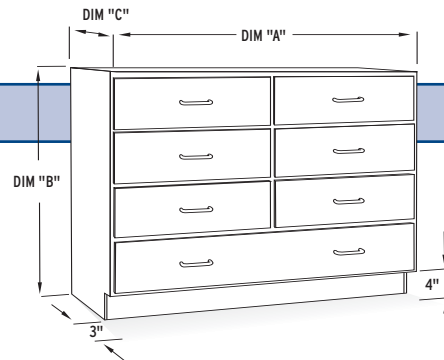

**NU-20**    **A**    **B**    **C**    **Basic Double Eight Drawer Unit**


NU-20-3630	36"	29"	22"
NU-20-4230	42"	29"	22"
NU-20-4830	48"	29"	22"
NU-20-3636	36"	35"	22"
NU-20-4236	42"	35"	22"
NU-20-4836	48"	35"	22"

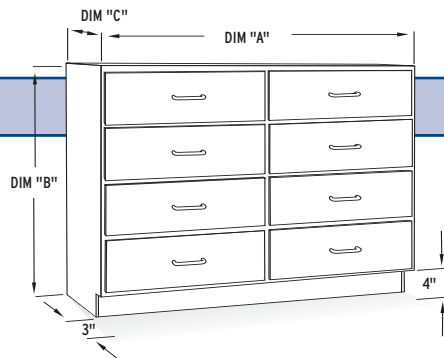

# POLYPROPYLENE CASEWORK

NU-25 (R) A B C			NU-25 (L) A B C				
NU-25-1830R	18"	29"	22"	NU-25-1830L	18"	29"	22"
NU-25-2430R	24"	29"	22"	NU-25-2430L	24"	29"	22"
NU-25-3030R	30"	29"	22"	NU-25-3030L	30"	29"	22"
NU-25-1836R	18"	35"	22"	NU-25-1836L	18"	35"	22"
NU-25-2436R	24"	35"	22"	NU-25-2436L	24"	35"	22"
NU-25-3636R	30"	35"	22"	NU-25-3636L	30"	35"	22"

Single Drawer/Door Combination Unit

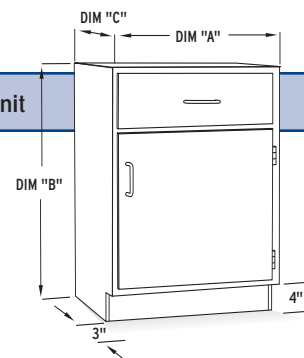


R=Right Hinged Door

L=Left Hinged Door


NU-30	A	B	C
NU-30-3630	36"	29"	22"
NU-30-4230	42"	29"	22"
NU-30-4830	48"	29"	22"
NU-30-3636	36"	35"	22"
NU-30-4236	42"	35"	22"
NU-30-4836	48"	35"	22"

Double Drawer/Door Combination Unit

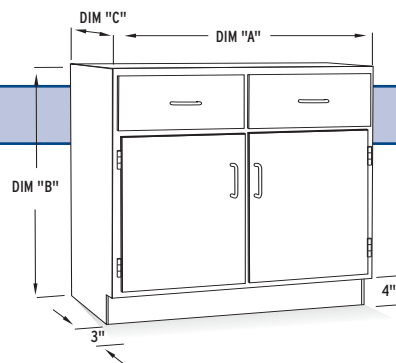


NU-35	A	B	C
NU-35-3024	30"	24"	12"
NU-35-3624	36"	24"	12"
NU-35-4224	42"	24"	12"
NU-35-4824	48"	24"	12"
NU-35-3030	30"	30"	12"
NU-35-3630	36"	30"	12"
NU-35-4230	42"	30"	12"
NU-35-4830	48"	30"	12"

Glass Sliding Door Wall Case

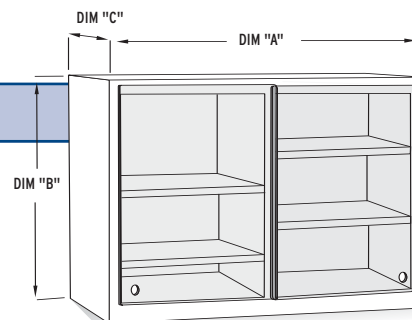


NU-36	A	B	C
NU-36-3024	30"	24"	12"
NU-36-3624	36"	24"	12"
NU-36-4224	42"	24"	12"
NU-36-4824	48"	24"	12"
NU-36-3030	30"	30"	12"
NU-36-3630	36"	30"	12"
NU-36-4230	42"	30"	12"
NU-36-4830	48"	30"	12"

Sliding Framed Glass Door Wall Case

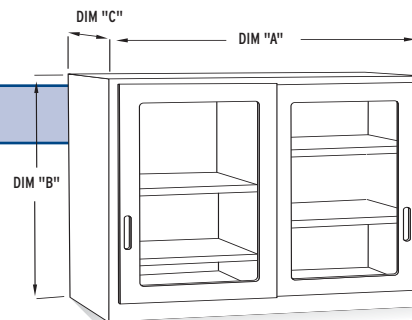

NU-40	A	B	C	Solid Double Hinged Door Wall Case
-------	---	---	---	------------------------------------


NU-40-3024	30"	24"	12"
NU-40-3624	36"	24"	12"
NU-40-4224	42"	24"	12"
NU-40-4824	48"	24"	12"
NU-40-3030	30"	30"	12"
NU-40-3630	36"	30"	12"
NU-40-4230	42"	30"	12"
NU-40-4830	48"	30"	12"

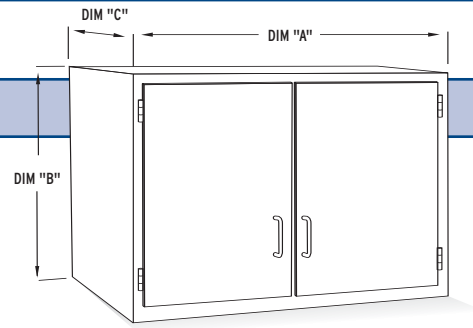

NU-41(R)	A	B	C	NU-41(L)	A	B	C	Single Framed Glass Door Wall Case
----------	---	---	---	----------	---	---	---	------------------------------------

NU-41-1824R	18"	24"	12"	NU-41-1824L	18"	24"	12"
NU-41-2424R	24"	24"	12"	NU-41-2424L	24"	24"	12"
NU-41-1830R	18"	30"	12"	NU-41-1830L	18"	30"	12"
NU-41-2430R	24"	30"	12"	NU-41-2430L	24"	30"	12"


R=Right Hinged Door  
L=Left Hinged Door

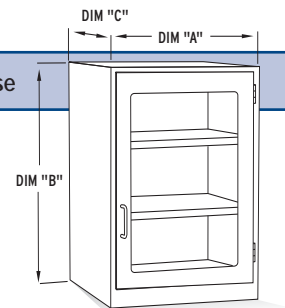

NU-42(R)	A	B	C	NU-42(L)	A	B	C	Single Solid Door Wall Case
----------	---	---	---	----------	---	---	---	-----------------------------


NU-42-1824R	18"	24"	12"	NU-42-1824L	18"	24"	12"
NU-42-2424R	24"	24"	12"	NU-42-2424L	24"	24"	12"
NU-42-1830R	18"	30"	12"	NU-42-1830L	18"	30"	12"
NU-42-2430R	24"	30"	12"	NU-42-2430L	24"	30"	12"

R=Right Hinged Door  
L=Left Hinged Door

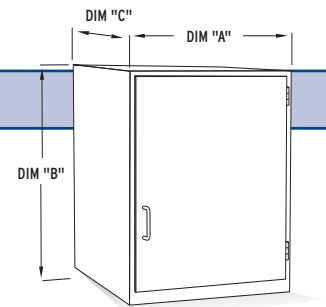

NU-43	A	B	C	Double Hinged Framed Glass Door Wall Case
-------	---	---	---	---


NU-43-3024	30"	24"	12"
NU-43-3624	36"	24"	12"
NU-43-4224	42"	24"	12"
NU-43-4824	48"	24"	12"
NU-43-3030	30"	30"	12"
NU-43-3630	36"	30"	12"
NU-43-4230	42"	30"	12"
NU-43-4830	48"	30"	12"

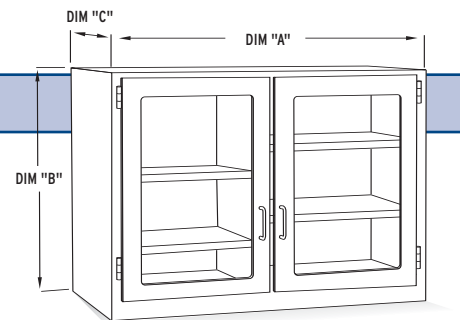

# POLYPROPYLENE CASEWORK


## NU-45 Double Door Sink Unit

	A	B	C
NU-45-3030	30"	29"	22"
NU-45-3630	36"	29"	22"
NU-45-4230	42"	29"	22"
NU-45-4830	48"	29"	22"
NU-45-3036	30"	35"	22"
NU-45-3636	36"	35"	22"
NU-45-4236	42"	35"	22"
NU-45-4836	48"	35"	22"

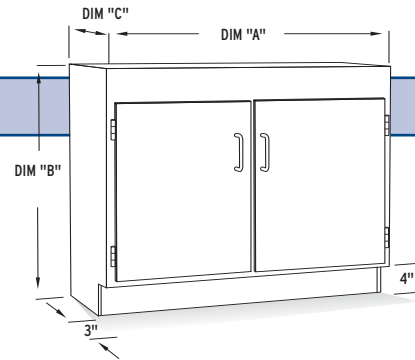


## NU-46 Double Door Sink Unit with Shelf

	A	B	C
NU-46-3030	30"	29"	22"
NU-46-3630	36"	29"	22"
NU-46-4230	42"	29"	22"
NU-46-4830	48"	29"	22"
NU-46-3036	30"	35"	22"
NU-46-3636	36"	35"	22"
NU-46-4236	42"	35"	22"
NU-46-4836	48"	35"	22"

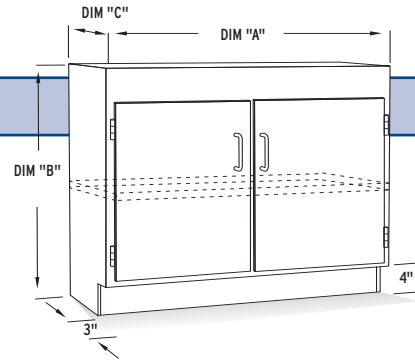


## NU-50 Vented Acid Storage Cabinet

	A	B	C
NU-50-3030	30"	29"	22"
NU-50-3630	36"	29"	22"
NU-50-4230	42"	29"	22"
NU-50-4830	48"	29"	22"
NU-50-3036	30"	35"	22"
NU-50-3636	36"	35"	22"
NU-50-4236	42"	35"	22"
NU-50-4836	48"	35"	22"

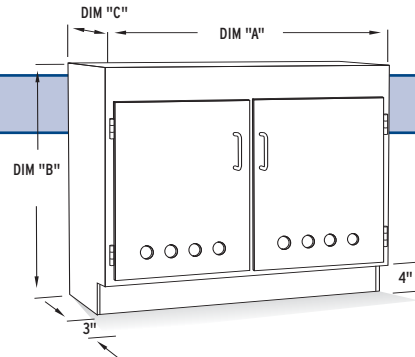


## NU-60 Knee Space Kit

	A	B	C
NU-60-3030	30"	29"	3"
NU-60-3630	36"	29"	3"
NU-60-4230	42"	29"	3"
NU-60-4830	48"	29"	3"
NU-60-3036	30"	35"	3"
NU-60-3636	36"	35"	3"
NU-60-4236	42"	35"	3"
NU-60-4836	48"	35"	3"

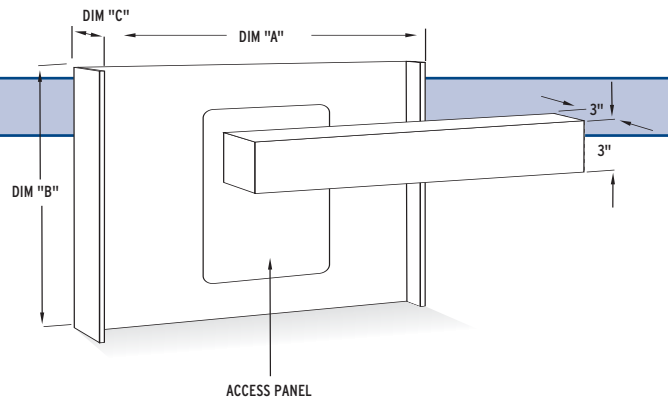


NU-61	A	B	C	Knee Space with Drawer
NU-61-3030	30"	29"	22"	
NU-61-3630	36"	29"	22"	
NU-61-4230	42"	29"	22"	
NU-61-4830	48"	29"	22"	
NU-61-3036	30"	35"	22"	
NU-61-3636	36"	35"	22"	
NU-61-4236	42"	35"	22"	
NU-61-4836	48"	35"	22"	

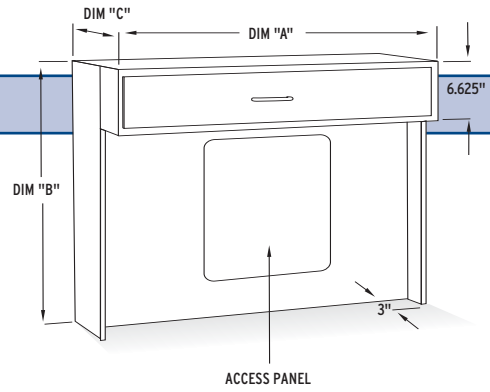

NU-70	A	B	Filler Panels
NU-70-2907	29"	XX	
NU-70-3507	35"	XX	


  

NU-72	A	B	
NU-72-24	24"	XX	
NU-72-30	30"	XX	

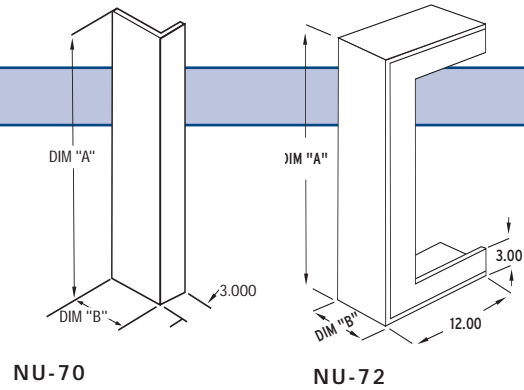

XX is defined by specs.

NU-73	A	B	C	Corner Filler Panels
NU-73-24	24"	XX	XX	
NU-73-30	30"	XX	XX	

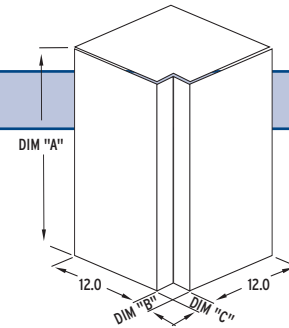


XX is defined by specs.

NU-76	A	B	Corner/End Filler Panels
NU-76-2911	29"	XX	
NU-76-3511	35"	XX	

NU-77	A	B	
NU-77-29	29"	1"	
NU-77-35	35"	1"	

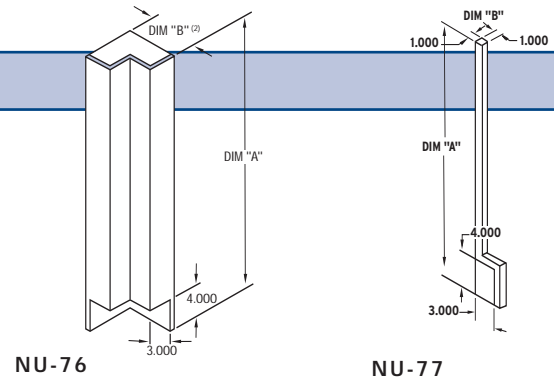

XX is defined by specs.

# POLYPROPYLENE CASEWORK

## NU-78 A B Base Filler Panel/Knee Support Panel


NU-78-29XX	29"	XX
NU-78-35XX	35"	XX

XX is defined by specs.

## NU-79 A B

NU-79-2922	29"	22"
NU-79-3522	35"	22"
NU-79-2930	29"	30"
NU-79-3530	35"	30"

Customer to specify left or right flange

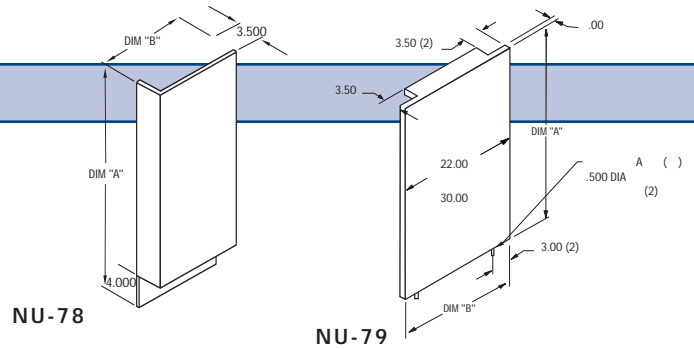


## NU-80 A B C Tall Framed Glass Door Storage Cabinet

NU-80-3084	30"	84"	22"
NU-80-3684	36"	84"	22"
NU-80-4284	42"	84"	22"
NU-80-4884	48"	84"	22"


## NU-81 A B C Tall Solid Door Storage Cabinet

NU-81-3084	30"	84"	22"
NU-81-3684	36"	84"	22"
NU-81-4284	42"	84"	22"
NU-81-4884	48"	84"	22"


### NU-80

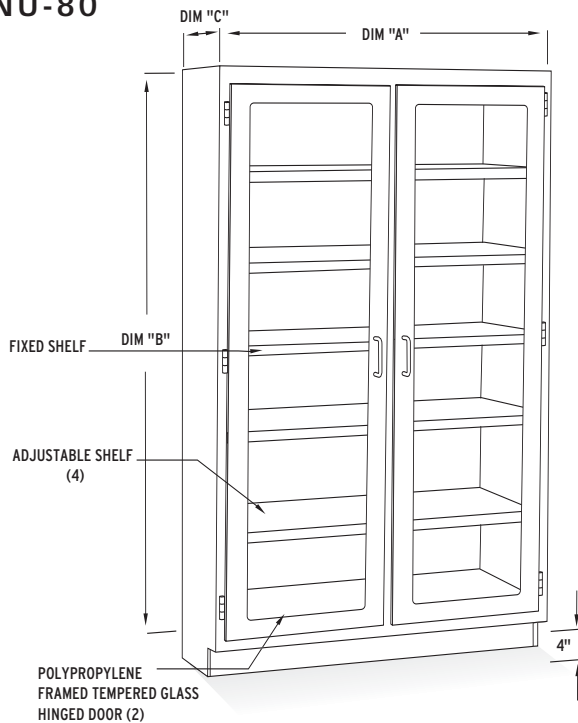


### NU-81

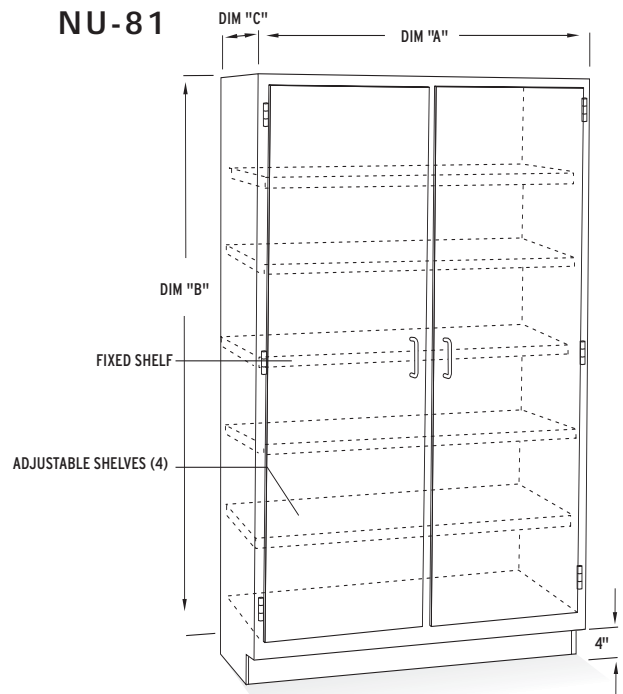


NU-85	A	B	C	Open Bookcase Wall Case
NU-85-3024	30"	24"	12"	
NU-85-3624	36"	24"	12"	
NU-85-4224	42"	24"	12"	
NU-85-4824	48"	24"	12"	
NU-85-3030	30"	30"	12"	
NU-85-3630	36"	30"	12"	
NU-85-4230	42"	30"	12"	
NU-85-4830	48"	30"	12"	

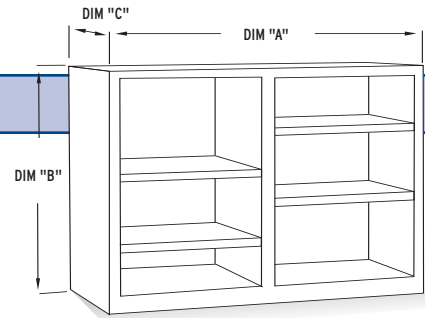

NU-86	A	B	C	Open Bookcase Base Cabinet
NU-86-3030	30"	29"	22"	
NU-86-3630	36"	29"	22"	
NU-86-4230	42"	29"	22"	
NU-86-4830	48"	29"	22"	
NU-86-3036	30"	35"	22"	
NU-86-3636	36"	35"	22"	
NU-86-4236	42"	35"	22"	
NU-86-4836	48"	35"	22"	

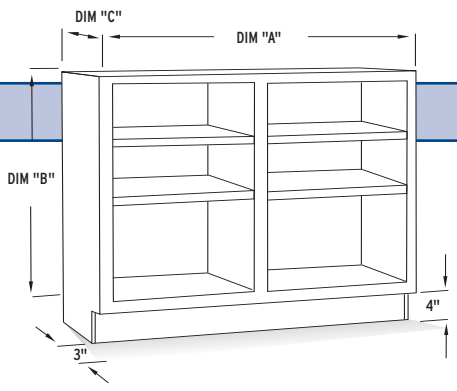


NU-90(R)	A	B	C	NU-90(L)	A	B	C	Solid Hinged Door Blind Corner Wall Case
NU-90-3024R	42"	24"	12"	NU-90-3024L	42"	24"	12"	
NU-90-3624R	48"	24"	12"	NU-90-3624L	48"	24"	12"	
NU-90-4224R	54"	24"	12"	NU-90-4224L	54"	24"	12"	
NU-90-4824R	60"	24"	12"	NU-90-4824L	60"	24"	12"	
NU-90-3030R	42"	30"	12"	NU-90-3030L	42"	30"	12"	
NU-90-3630R	48"	30"	12"	NU-90-3630L	48"	30"	12"	
NU-90-4230R	54"	30"	12"	NU-90-4230L	54"	30"	12"	
NU-90-4830R	60"	30"	12"	NU-90-4830L	60"	30"	12"	

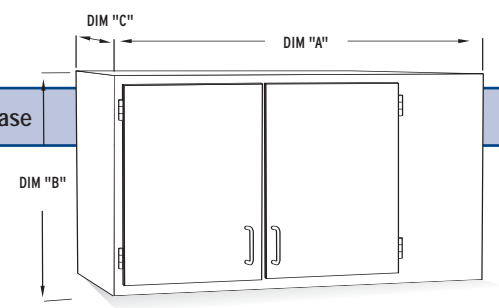

R=Right Corner Wall Case  
L=Left Corner Wall Case

NU-91(R)	A	B	C	NU-91(L)	A	B	C	Solid Hinged Door Blind
NU-91-3030R	52"	29"	22"	NU-91-3030L	52"	29"	22"	
NU-91-3630R	58"	29"	22"	NU-91-3630L	58"	29"	22"	
NU-91-4230R	64"	29"	22"	NU-91-4230L	64"	29"	22"	
NU-91-4830R	70"	29"	22"	NU-91-4830L	70"	29"	22"	
NU-91-3036R	52"	35"	22"	NU-91-3036L	52"	35"	22"	
NU-91-3636R	58"	35"	22"	NU-91-3636L	58"	35"	22"	
NU-91-4236R	64"	35"	22"	NU-91-4236L	64"	35"	22"	
NU-91-4836R	70"	35"	22"	NU-91-4836L	70"	35"	22"	

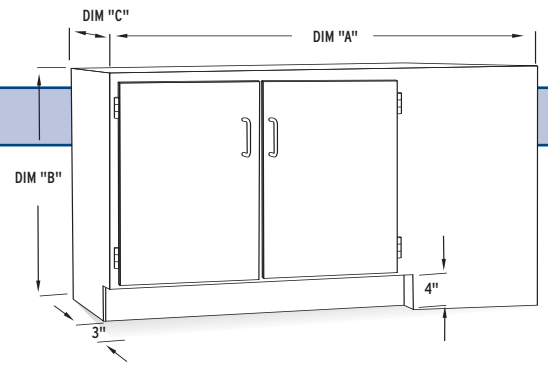


R=Right Corner Unit  
L=Left Corner Unit

## POLYPROPYLENE CASEWORK


### NU-92 A B C Polypropylene Corner Wall Case

NU-92-1224	12"	24"	12"
NU-92-1624	16"	24"	12"
NU-92-1230	12"	30"	12"
NU-92-1630	16"	30"	12"

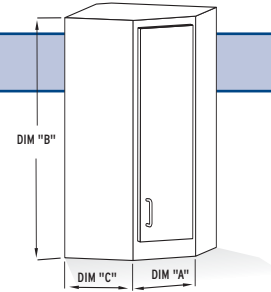

### NU-93 A B C Polypropylene Corner Cabinet

NU-93-1230	12"	29"	22"
NU-93-1630	16"	29"	22"
NU-93-1236	12"	35"	22"
NU-93-1636	16"	35"	22"

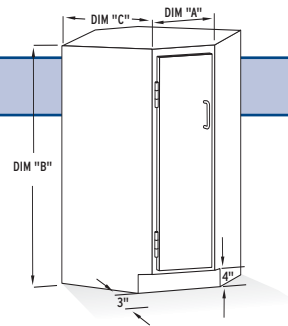

## Other Available Casework

**NU-47** Polypropylene Sink Supports

## Countertops Available

Tops can be purchased with or without 4" back splash. Typically 1" thick.

**NU-120** Polypropylene (Black or White)

**NU-100** Epoxy Resin

**NU-110** Corian®

## NU-98 Custom Polypropylene Table

### Standard Features

- 100% White Polypropylene Base
- Chemical Resistant
- Adjustable Leg Levelers

### Optional Features

- Black Epoxy Top
- Black Polypropylene Top
- Casters
- Sizes Determined by Customer



# CHEMICAL RESISTANCE GUIDE

PLEASE NOTE: This guide is intended as general information only. Since each pair of ratings listed is for *ideal* conditions, consider all factors when evaluating chemical resistance.

**MATERIALS KEY:**  
 LDPE – Low Density Polyethylene  
 HDPE – High Density Polyethylene  
 HFE/PA – Polypropylene/Polypropylene Copolymer  
 PMP – Polymethylpentene  
 PC – Polycarbonate

PVC – Polyvinyl Chloride  
 PSF – Polysulfone  
 FEP – Teflon® FEP  
 TFE – Teflon® TFE  
 PFA – Teflon® PFA

**RATINGS KEY:** E – Excellent G – Good F – Fair N – Not Recommended  
 First letter of each pair applies to conditions at 20°C; the second to those at 50°C.

▼ CHEMICAL	MATERIAL ▶	LDPE	HDPE	PP/PPCO	PMP	FEP/TFE/PFA	PC	RIGID PVC	PSF
Acetaldehyde		GN	GF	GN	GN	EE	FN	GN	NN
Acetamide (saturated)		EE	EE	EE	EE	EE	NN	NN	NN
Acetic Acid (5%)		EE	EE	EE	EE	EE	EG	EE	EE
Acetic Acid (50%)		EE	EE	EE	EE	EE	EG	EG	GG
Acetone		NN	NN	EE	EE	EE	NN	NN	NN
Acetonitrile		EE	EE	FN	FN	EE	NN	NN	NN
Acrylonitrile		EE	EE	FN	FN	EE	NN	NN	NN
Adipic Acid		EG	EE	EE	EE	EE	EE	EG	GG
Alanine		EE	EE	EE	EE	EE	NN	NN	NN
Allyl Alcohol		EE	EE	EE	EG	EE	GF	GF	GF
Aluminum Hydroxide		EG	EE	EG	EG	EE	FN	EG	GG
Aluminum Salts		EE	EE	EE	EE	EE	EG	EE	EE
Amino Acids		EE	EE	EE	EE	EE	EE	EE	EE
Ammonia		EE	EE	EE	EE	EE	NN	EG	GF
Ammonium Acetate (saturated)		EE	EE	EE	EE	EE	EE	EE	EE
Ammonium Glycolate		EG	EE	EG	EG	EE	GF	EE	GG
Ammonium Hydroxide (5%)		EE	EE	EE	EE	EE	FN	EE	GG
Ammonium Hydroxide (30%)		EG	EE	EG	EG	EE	NN	EG	GG
Ammonium Oxalate		EG	EE	EG	EG	EE	EE	EE	EE
Ammonium Salts		EE	EE	EE	EE	EE	EG	EG	EE
n-Amyl Acetate		GF	EG	GF	GF	EE	NN	NN	NN
Amyl Chloride		NN	FN	NN	NN	EE	NN	NN	NN
Aniline		EG	EG	GF	GF	EE	FN	NN	NN
Benzaldehyde		EG	EE	EG	EG	EE	FN	NN	FF
Benzene		NN	NN	NN	GF	EE	NN	NN	NN
Benzoic Acid (saturated)		EE	EE	EG	EG	EE	EG	EG	FF
Benzyl Acetate		EG	EE	EG	EG	EE	FN	NN	NN
Benzyl Alcohol		NN	FN	NN	NN	EE	NN	GF	NN
Bromine		NN	FN	NN	NN	EE	FN	GN	NN
Bromobenzene		NN	FN	NN	NN	EE	NN	NN	NN
Bromoform		NN	NN	NN	NN	EE	NN	NN	NN
Butadiene		NN	FN	NN	NN	EE	NN	FN	NN
n-Butyl Acetate		GF	EG	GF	GF	EE	NN	NN	NN
n-Butyl Alcohol		EE	EE	EE	EG	EE	GF	GF	GF
sec-Butyl Alcohol		EG	EE	EG	EG	EE	GF	GG	GF
tert-Butyl Alcohol		EG	EE	EG	EG	EE	GF	EG	GF
Butyric Acid		NN	FN	NN	NN	EE	FN	GN	GG
Calcium Hydroxide (concentrated)		EE	EE	EE	EE	EE	NN	EE	GG
Calcium Hypochlorite (saturated)		EE	EE	EE	EG	EE	FN	GF	EE
Carbazole		EE	EE	EE	EE	EE	NN	NN	NN
Carbon Disulfide		NN	NN	NN	NN	EE	NN	NN	NN
Carbon Tetrachloride		FN	GF	GF	NN	EE	NN	GF	NN
Cedarwood Oil		NN	FN	NN	NN	EE	GF	FN	FF
Cellosolve Acetate		EG	EE	EG	EG	EE	FN	FN	NN
Chlorine (10% in air)		GN	EF	GN	GN	EE	EG	EE	NN
Chlorine (10% (moist))		GN	GF	FN	GN	EE	GF	EG	NN
Chloroacetic Acid		EE	EE	EG	EG	EE	FN	FN	NN
p-Chloroacetophenone		EE	EE	EE	EE	EE	NN	NN	NN
Chloroform		FN	NN	NN	NN	EE	NN	NN	NN
Chromic Acid (10%)		EE	EE	EE	EE	EE	GF	EG	NN
Chromic Acid (50%)		EE	EE	GF	GF	EE	FN	EF	NN
Cinnamom Oil		NN	FN	NN	NN	EE	GF	NN	FF
Citric Acid (10%)		EE	EE	EE	EE	EE	EG	GG	EE
Cresol		NN	FN	GF	NN	EE	NN	NN	NN
Cyclohexane		FN	FN	FN	NN	EE	EG	GF	NN
Decalin		GF	EG	GF	FN	EE	NN	EG	NN
o-Dichlorobenzene		FN	FF	FN	FN	EE	NN	NN	NN
p-Dichlorobenzene		FN	GF	GF	GF	EE	NN	NN	NN
Diethyl Benzene		NN	FN	NN	NN	EE	FN	NN	NN
Diethyl Ether		NN	FN	NN	NN	EE	NN	FN	NN
Diethyl Ketone		NN	NN	GG	GF	EE	NN	NN	NN
Diethyl Malonate		EE	EE	EE	EG	EE	FN	GN	FF
Diethylene Glycol		EE	EE	EE	EE	EE	GF	FN	GG
Diethylene Glycol Ethyl Ether		EE	EE	EE	EE	EE	FN	FN	FF
Dimethylformamide		EE	EE	EE	EE	EE	NN	FN	NN
Dimethyl Sulfoxide		EE	EE	EE	EE	EE	NN	NN	NN
1, 4-Dioxane		GF	GG	GF	GF	EE	GF	FN	GF
Dipropylene Glycol		EE	EE	EE	EE	EE	GF	GF	GG
Ether		NN	FN	NN	NN	EE	NN	FN	NN
Ethyl Acetate		EE	EE	EE	FN	EE	NN	NN	NN
Ethyl Alcohol (Absolute)		EG	EE	EG	EG	EE	EG	EG	EG
Ethyl Alcohol (40%)		EG	EE	EG	EG	EE	EG	EE	EG
Ethyl Benzene		NN	NN	NN	NN	EE	NN	NN	NN
Ethyl Benzoate		FF	GG	GF	GF	EE	NN	NN	NN
Ethyl Butyrate		GN	GF	GN	FN	EE	NN	NN	NN
Ethyl Chloride (liquid)		FN	FF	FN	FN	EE	NN	NN	NN
Ethyl Cyanoacetate		EE	EE	EE	EE	EE	FN	FN	FF
Ethyl Lactate		EE	EE	EE	EE	EE	FN	FN	FF
Ethylene Chloride		GN	GF	FN	NN	EE	NN	NN	NN
Ethylene Glycol		EE	EE	EE	EE	EE	GF	EE	EE
Ethylene Glycol Methyl Ether		EE	EE	EE	EE	EE	FN	FN	FF
Ethylene Oxide		FF	GF	FF	FN	EE	FN	FN	EE
Fluorides		EE	EE	EE	EE	EE	EE	EE	EE
Fluorine		FN	GN	FN	FN	EG	GF	EG	NN
Formaldehyde (10%)		EE	EE	EE	EG	EE	EG	GF	GF

▼ CHEMICAL	MATERIAL ▶	LDPE	HDPE	PP/PPCO	PMP	FEP/TFE/PFA	PC	RIGID PVC	PSF
Formaldehyde (40%)		EG	EE	EG	EG	EE	EG	GF	GF
Formic Acid (3%)		EG	EE	EG	EG	EE	EG	GF	GG
Formic Acid (50%)		EG	EE	EG	EG	EE	EG	GF	GG
Formic Acid (98-100%)		EG	EE	EG	EF	EE	EF	FN	FF
Fuel Oil		FN	GF	EG	GF	EE	EG	EE	EG
Gasoline		FN	GG	GF	GF	EE	FF	GN	FF
Glacial Acetic Acid		EG	EE	EG	EG	EE	NN	EG	FN
Glycerin		EE	EE	EE	EE	EE	EE	EE	EE
n-Heptane		FN	GF	FF	FF	EE	EG	GF	EG
Hexane		NN	GF	GF	FN	EE	FN	GN	EG
Hydrochloric Acid (1-5%)		EE	EE	EE	EG	EE	EE	EE	EE
Hydrochloric Acid (20%)		EE	EE	EE	EG	EE	GF	EG	EE
Hydrochloric Acid (35%)		EE	EE	EG	EG	EE	NN	GF	EE
Hydrofluoric Acid (4%)		EG	EE	EG	EG	EE	GF	GF	GF
Hydrofluoric Acid (48%)		EE	EE	EE	EE	EE	NN	GF	FN
Hydrogen Peroxide (3%)		EE	EE	EE	EE	EE	EE	EE	EE
Hydrogen Peroxide (30%)		EG	EE	EG	EG	EE	EE	EE	EE
Hydrogen Peroxide (90%)		EG	EE	EG	EG	EE	EE	EG	EE
Isobutyl Alcohol		EE	EE	EE	EG	EE	EG	EG	EG
Isopropyl Acetate		GF	EG	GF	GF	EE	NN	NN	NN
Isopropyl Alcohol		EE	EE	EE	EE	EE	EE	EG	EE
Isopropyl Benzene		FN	GF	FN	NN	EE	NN	NN	NN
Kerosene		FN	GG	GF	GF	EE	EE	EE	GF
Lactic Acid (3%)		EG	EE	EG	EG	EE	EG	GF	EE
Lactic Acid (85%)		EE	EE	EG	EG	EE	EG	GF	EE
Methoxyethyl Oleate		EG	EE	EG	EG	EE	FN	NN	NN
Methyl Alcohol		EE	EE	EE	EE	EE	GF	EF	GF
Methyl Ethyl Ketone		NN	NN	EG	NN	EE	NN	FN	NN
Methyl Isobutyl Ketone		NN	NN	GF	FF	EE	NN	NN	NN
Methyl Propyl Ketone		GF	EG	GF	FF	EE	NN	NN	NN
Methylene Chloride		FN	FN	FN	FN	EE	NN	NN	NN
Mineral Oil		GN	EE	EE	E&	EE	EG	EG	EE
Nitric Acid (1-10%)		EE	EE	EE	EE	EE	EG	EG	EE
Nitric Acid (50%)		GN	GN	FN	GN	EE	GF	GF	GF
Nitric Acid (70%)		FN	GN	NN	GF	EE	NN	FN	NN
Nitrobenzene		NN	FN	NN	NN	EE	NN	NN	NN
n-Octane		EE	EE	EE	EE	EE	GF	FN	GF
Orange Oil		FN	GF	GF	FF	EE	FF	FN	FF
Ozone		EG	EE	EG	EE	EE	EG	EG	EE
Perchloric Acid		GN	GN	GN	GN	GF	NN	GN	NN
Perchloroethylene		NN	NN	NN	NN	EE	NN	NN	NN
Phenol, Crystals		GN	GF	GN	FG	EE	EN	FN	FF
Phosphoric Acid (1-5%)		EE	EE	EE	EE	EE	EE	EE	EE
Phosphoric Acid (85%)		EE	EE	EG	EG	EE	EG	EG	EE
Pine Oil		GN	EG	EG	GF	EE	GF	FN	FF
Potassium Hydroxide (1%)		EE	EE	EE	EE	EE	FN	EE	EE
Potassium Hydroxide (conc.)		EE	EE	EE	EE	EE	NN	EG	EE
Propane Gas		NN	FN	NN	NN	EE	FN	EG	FF
Propylene Glycol		EE	EE	EE	EE	EE	GF	FN	GG
Propylene Oxide		EG	EE	EG	EG	EE	GF	FN	GG
Resorcinol (saturated)		EE	EE	EE	EE	EE	GF	FN	NN
Resorcinol (5%)		EE	EE	EE	EE	EE	GF	GN	NN
Salicylaldehyde		EG	EE	EG	EG	EE	GF	FN	FF
Salicylic Acid (powder)		EE	EE	EE	EG	EE	EG	GF	EE
Salicylic Acid (saturated)		EE	EE	EE	EE	EE	EG	GF	EE
Salt Solutions (metallic)		EE	EE	EE	EE	EE	EE	EE	EE
Silver Acetate		EE	EE	EE	EE	EE	EG	GG	EE
Silver Nitrate		EG	EE	EG	EE	EE	EE	EG	EE
Sodium Acetate (saturated)		EE	EE	EE	EE	EE	EG	GF	EE
Sodium Hydroxide (1%)		EE	GF	EE	EE	EE	FN	EE	EE
Sodium Hydroxide (50% to sat.)		GG	GF	EE	EE	EE	NN	NN	EG
Sodium Hypochlorite (15%)		EE	EE	GF	EE	EE	GF	EE	EE
Stearic Acid, Crystals		EE	EE	EE	EE	EE	EG	EG	GG
Sulfuric Acid (1-6%)		EE	EE	EE	EE	EE	EE	EG	EE
Sulfuric Acid (20%)		EE	EE	EG	EG	EE	EG	EG	EE
Sulfuric Acid (60%)		EG	EE	EG	EG	EE	GF	EG	EE
Sulfuric Acid (98%)		GG	GG	FN	GG	EE	NN	GN	NN
Sulfur Dioxide, Liquid, 46 psi		NN	FN	NN	NN	EE	GN	FN	GG
Sulfur Dioxide (wet or dry)		EE	EE	EE	EE	EE	EG	EG	GG
Sulfur Salts		FN	GF	FN	FN	EE	FN	NN	GG
Tartaric Acid		EE	EE	EE	EE	EE	EG	EG	EE
Tetrahydrofuran		FN	GF	GF	FF	EE	NN	NN	NN
Thionyl Chloride		NN	NN	NN	NN	EE	NN	NN	NN
Toluene		FN	GG	GF	FF	FF	FN	NN	NN
Tributyl Citrate		GF	EG	GF	GF	EE	NN	FN	FF
Trichloroethane		NN	FN	NN	NN	EE	NN	NN	NN
Trichloroethylene		NN	FN	NN	NN	EE	NN	NN	NN
Triethylene Glycol		EE	EE	EE	EE	EE	EG	GF	EE
Tripropylene Glycol		EE	EE	EE	EE	EE	EG	GF	EE
Turpentine		FN	GG	GF	FF	EE	FN	GF	NN
Undecyl Alcohol		EF	EG	EG	EG	EE	GF	EF	FF
Urea		EE	EE	EE	EE	EE	NN	GN	FF
Vinylidene Chloride		NN	FN	NN	NN	EE	NN	NN	NN
Xylene		GN	GF	FN	FN	EE	NN	NN	NN
Zinc Stearate		EE	EE	EE	EE	EE	EE	EG	EE



[www.nuaire.com](http://www.nuaire.com)

2100 Fernbrook Lane  
Plymouth, MN 55447  
U.S.A.  
Phone: 763.553.1270  
Fax: 763.553.0459  
1.800.328.3352