

Futura

-40°C

Low Temp Chest Freezers

Our **FUTURA PLUS+ Series** low temperature manual defrost chest freezers are designed for applications in the standard research and clinical market requiring more rigorous temperature control and construction features.



LABL-5-CT45

Standard Product Features:

- Manual defrost
- 5.0, 9.0 & 13.0 cu. ft. capacities
- -40°C, -43°C & -45°C temperature ranges
- Digital control with two temperature displays. One display shows the set temperature, the other shows the actual temperature in the freezer.
- Battery operated alarm system will emit an audible and visual signal when there is a mechanical or electrical failure. The alarm has an over and under temperature setting, alarm silencing switch, and battery test switch.
- Single-stage type refrigeration system with hermetic motor compressor
- Four heavy duty, swivel casters allow for convenient mobility
- White interior and exterior with hinged solid door
- 115V operation
- ETL electrical approved
- Warranties: 1 year parts and 90 days labor

Optional Features:

- Chart recorder
- Alarm relay contacts




LABL-13-CT40

LABRepCo

One Company • Many Solutions


Specifications and Ordering Information:

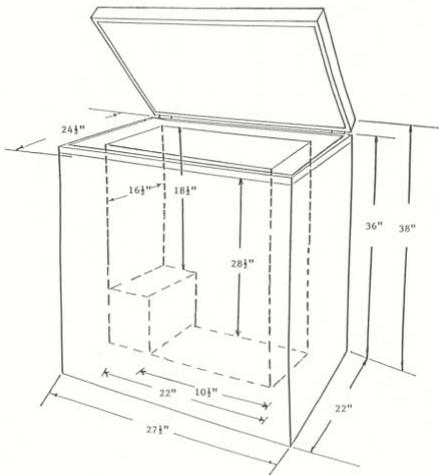


**LABL-5-CT40 &
LABL-5-CT45**

Models	<i>LABL-5-CT40</i>	<i>LABL-5-CT45</i>	<i>LABL-9-CT43</i>	<i>LABL-13-CT40</i>
Overall Height in.	39	39	38 1/2	38 1/2
Overall Width in.	28 1/2	28 1/2	42	43
Overall Depth in.	22	22	24 1/2	31
Interior Height in.	27 1/2	27 1/2	28 1/2	28 1/2
Interior Width in.	23	23	36	37 1/2
Interior Depth in.	15	15	16 1/2	22
Interior cu. ft.	5.0	5.0	9.0	13.0
Number of Casters	4	4	4	4
Temperature	0° to -40°C	0° to -45°C	0° to -43°C	0° to -40°C
Voltage	115V, 1PH, 60Hz	115V, 1PH, 60Hz	115V, 1PH, 60Hz	115V, 1PH, 60Hz

Specifications subject to change without notice.

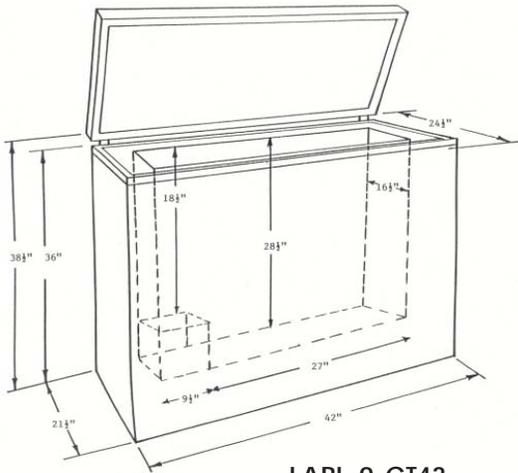

LABL-9-CT43

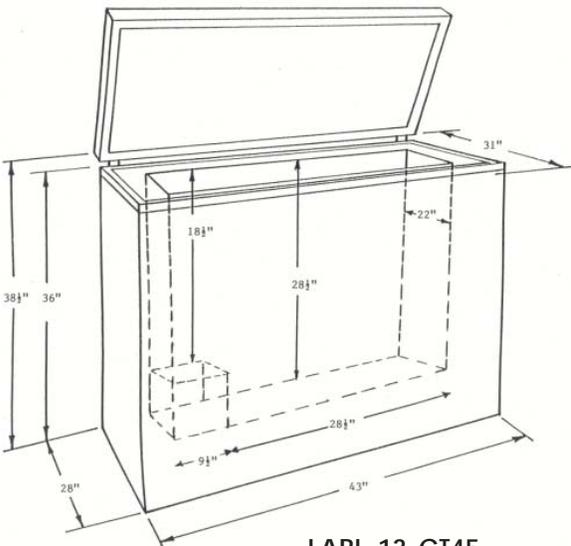

LABL-13-CT45



Maximize Freezer Space
Please visit labrepco.com or speak with your local representative for inventory rack information.